

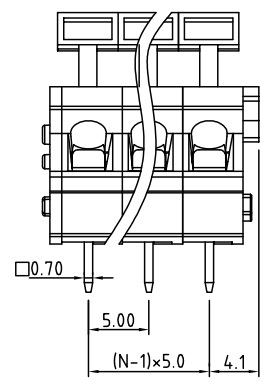



SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

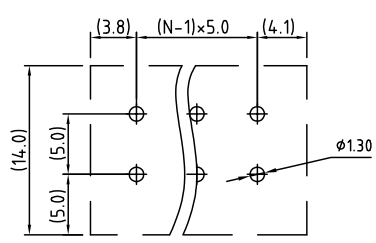

N=Number of poles

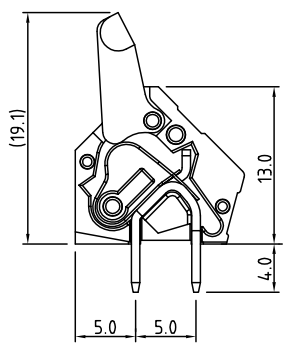

RECOMMENDED PCB LAYOUT

- Material**
- Terminal body(Contact pin) : Brass
 - Surface of solder tail : Tin plated
 - Wire guard : Stainless steel
 - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical** cULus
- Voltage rating: 300V
 - Current rating: 15A
 - Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 245°C±10°C/5 Sec

RoHS Compliant

PART NUMBER:

OSTHTXX0080

- | | |
|------------------------------|--------------------|
| No. of Poles: | COLOR |
| 01 1 Pole (basic block) | 0: Black |
| 02 2 Poles | 5: Green |
| etc. available in 1-24 Poles | 6: Blue |
| | 8: Grey (Standard) |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTHT-5.0 Series				
PART NO.		OSTHTXX0080		DWG NO.	OSTHTXX0080.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		姜開福	姜開福		X.	±0.50
		2006.01.13	2006.01.13		X.X	±0.30
					X.XX	±0.10
					X*	±1*
				SHEET: 01/01	REV: C	