


6/8/10/12 poles, Spacing 5.0 mm  
insert required no. of poles **X**  
How to order see page 5



1-n poles, Spacing 5.0 mm  
insert required no. of poles **X**  
How to order see page 5

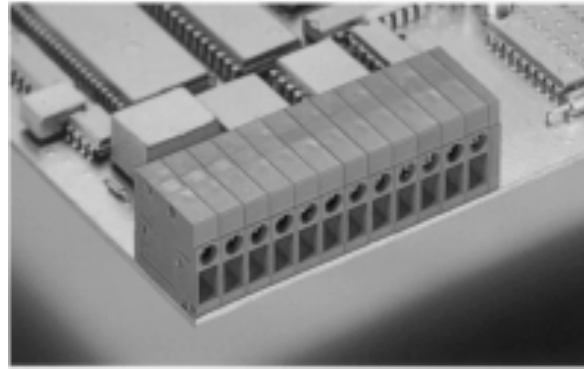

300 V  
20 A  
AWG 30-12

250 V  
24 A (T60)  
2.5 mm<sup>2</sup>  
2.0 kV  
0.5 Nm/M3

4.0 mm<sup>2</sup>  
2.5 mm<sup>2</sup>  
2.5 mm<sup>2</sup>

5.0 mm  
1.3 mm  
8.0 mm

PA  
UL94 V-0  
-30°C/+105°C  
CuZn  
Cu



### Ratings:

Rated Voltage  
Rated Current  
Wire Size  
Test Voltage  
Rated Torque/ScrewSize

300 V  
20 A  
AWG 30-12

250 V  
24 A (T60)  
2.5 mm<sup>2</sup>  
2.0 kV  
0.5 Nm/M2.5

### Max. Rated Cross Section

Single Wire (solid)  
Stranded Wire (flexible)  
Stranded wire with Ferrules

2.5 mm<sup>2</sup>  
2.5 mm<sup>2</sup>  
2.5 mm<sup>2</sup>

### Dimensions

Spacing  
PCB Hole Diameter  
Stripped Length

5.0 mm  
1.3 mm  
9.0 mm

### Materials

Insulating Material  
Flammability Class  
Temperature Range  
Clamp Cage  
Wire Guard

PA  
UL94 V-0  
-30°C/+105°C  
Fe/Fe  
Cu

### Color

Green

