
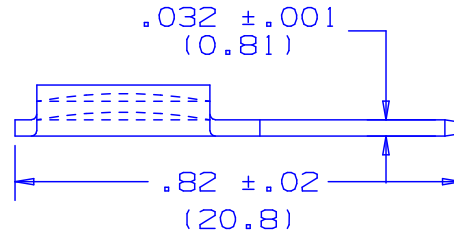


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. D-250A DISCONNECT ADAPTER
COUPLES TWO FEMALE DISCONNECTS
TO ONE MALE DISCONNECT
ALL .250 X .032 (6.3 X 0.8)
2. MATERIAL:
A. STAMPING: TIN PLATED BRASS
3. PACKAGE QTY:
A. STD: -C = 100
B. BULK: -M = 1000
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. MAXIMUM OPERATING TEMPERATURE: 130 C°

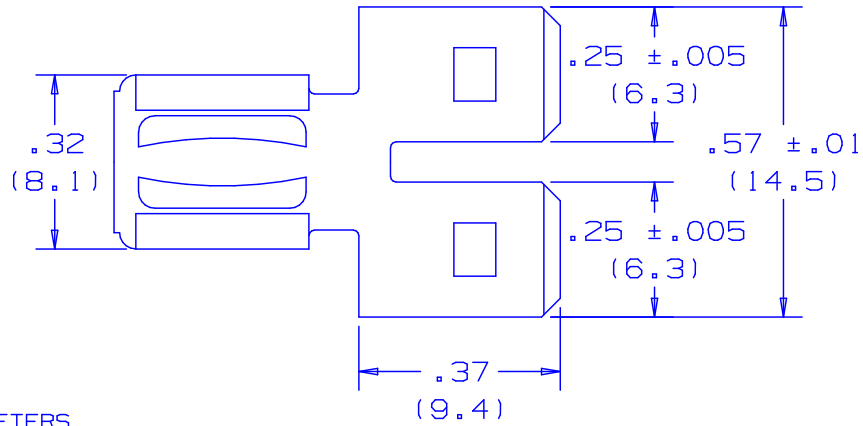

06	9/04	JHNU		ADDED NOTE 5.														A41323_06
05	1/01	RM	SKB	FILESPEC WAS N41323AA_PCD_04	08925	JAC	CCH											
04	12/94	TH		ADDED TOLERANCES	02707													
03	5/92	BK	RLS	UPDATED NOTES TAB WIDTH DIMENSION WAS .25 (6.4)	00967													
2	8-88	DW		REDRAWN WITH REVISIONS														
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.							
								DAW	CJH	NONE	A41323							

PANDUIT CORP. TINLEY PARK, ILLINOIS

.250 (6.3) DISCONNECT ADAPTER D-250A