

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50				
	K2	REVISED PER ECO-11-004820	11MAR11	RK	HMR

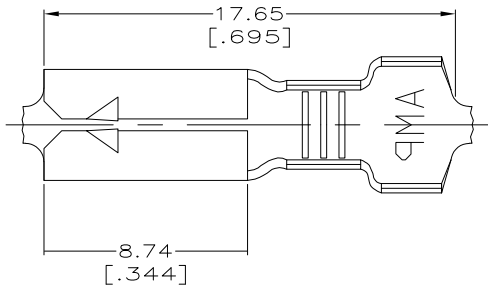

- 1 CONTINUOUS STRIP ON REEL.
- △2 0.002032 [.000080] MIN TIN PL PER ASTM-B545.
- △3 0.00508 [.000200] MIN SILVER PL OVER 0.00254 [.000100] MIN COPPER UNDEPLATE OR 0.00127 [.000050] MIN NICKEL UNDEPLATE.

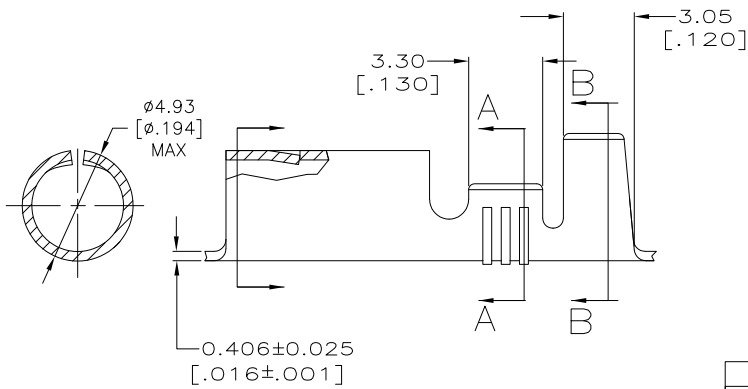

SECTION A-A  
SCALE 10:1



SECTION B-B  
SCALE 10:1

△3	3.30-4.44 DIA	[18-14] AWG	42142-4
-	[.130-.175]		42142-2
△2			42142-1
FINISH	INSULATION RANGE	WIRE RANGE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 29/AUG/95 PHILLIP M. FORTNEY	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK 29/AUG/95 JEFF R RUTH		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 29/AUG/95 GARY YETTER	NAME RECEPTACLE, SHUR PLUG, 3.96 [.156] DIA	
0 PLC ± -		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
1 PLC ± -		APPLICATION SPEC	A3 00779 C-42142	
2 PLC ± 0.25 [.010]		WEIGHT	RESTRICTED TO	
3 PLC ± -			CUSTOMER DRAWING	
4 PLC ± -			SCALE 6:1	SHEET 1 OF 1
ANGLES ± -			REV K2	
MATERIAL 4M BRASS	FINISH SEE TABLE			