


1. WIRE RANGE: 0.2 - 0.6 MM² (24 - 20 AWG)
2. INSULATION RANGE: 1.02 - 2.54

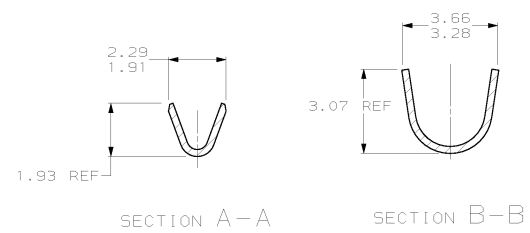

1.40	.055	2.41	.095	4.11	.162	-	-
1.359	.0535	2.29	.090	3.66	.144	-	-
1.14	.045	1.93	.076	3.28	.129	13.67	.538
1.02	.040	1.91	.075	3.07	.121	13.51	.532
0.25	.010	1.486	.0585	2.79	.110	8.51	.335
0.13	.005	1.47	.058	2.54	.100	4.27	.168
MM	IN	MM	IN	MM	IN	MM	IN

CONVERSION TABLE

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT		DW: T. BECK 6-22-97 CHK: S. SWING 6-22-97 APP: J. BENDISZKY 6-17-97 APPLICATION SPEC: - REVISION: - REPRINT: - CUSTOMER DRAWING	<table border="1"> <tr> <td>MATTE TIN FINISH</td> <td>0.25 BE COPPER</td> <td>61323-2</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table> <p>AMP AMP Incorporated Harrisburg, PA 17105-3608</p> <p>RECEPTACLE, .058 DIAMETER, 24-20 AWG, .040-.100 INSULATION, RIGHT ANGLE, P.C. CONTACT</p> <p>FILE: 046-005 (DRAWING NO) A200779 C 61323</p>	MATTE TIN FINISH	0.25 BE COPPER	61323-2			
MATTE TIN FINISH	0.25 BE COPPER	61323-2							