

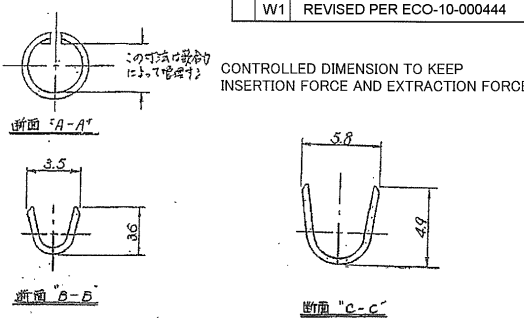


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	DATE	BY	APPD
T	15OCT'04	変更 REVISIED FJD0-0244-04	15OCT'04	Y.Y	N.Y
U	7JUL'05	変更 REVISIED ECR-05-006237	7JUL'05	J.S	N.Y
W	25MAY'07	変更 REVISIED ECR-07-011381	25MAY'07	J.S	S.M
W1	08JAN10	REVISIED PER ECO-10-000444	08JAN10	KK	AEG

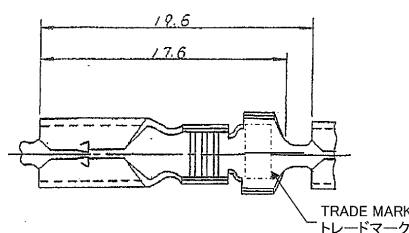

OBSELETE	9-170003-5	7000	108-5003	POST-TIN 電気溶めつき
	3-170003-6	7000	108-5003	PRE-TIN
	170003-8	7000	108-5003	NON ACID CLEANING 酸洗処理なし
	170003-6	7000	108-5003 埋め	
	2-170003-5	24000	108-5003	
	1- -5	25000	-5003	
	1- -4	24000	-5003	POST-TIN 電気溶めつき
	-5	170021-3	7000	-5003
	-4	170021-2	7000	POST-TIN 電気溶めつき
	170003-3	7000	108-5003	
PARTS NUMBER	L/P PARTS NUMBER	QTY/REEL	PRODUCT SPEC	FINISH
端子型番	L/P 型番	1リール当り数量	製品規格番号	仕上げ

- NOTES:
- 1st EXTRACTION FORCE : 14.7~44.1N (1.5~4.5kgf)
(APPLICABLE CONTACT P/N 170002-4)
 - STRESS RELIEVING
FINISH IS SUBJECT TO CHANGE BY THE TYPE OF STRESS RELIEVING PROCESS.
INERT GAS FURNACE ... MATTE
ATMOSPHERIC FURNACE FOLLOWED BY ACID PICKLE ... BRIGHT
 - WITH PAPER LAYER
 - OBSELETE PARTS: OBSELETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 注:
- 初回引抜き力 : 14.7~44.1N (1.5~4.5kgf)
(嵌合相手 P/N:170002-4)
 - ストレス除去処理
処理法により外觀が変わります。
不活性ガス加熱方式... 無光沢
大気加熱方式 ... 光沢
 - 中間紙あり

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

MATERIAL: BRASS THK 0.4 黄銅 板厚 0.4

FINISH: SEE TABLE 表参照

WIRE RANGE: 0.50~2.27mm² (AWG#20-#14)

WIRE DIA: 2.5~3.8mm

7. J. Johnson 18 Sep 00

18 Sep 00

TYCO Electronics

TYCO Electronics AMP K.K. Kawasaki, Japan

NAME: φ5 SHUR PLUG RECEPTACLE φ5 シェアプラグ リセプタクル

PRODUCT SPEC: 108-5003

APPLICATION SPEC: #

SIZE: A3

EDGE CODE: 00779

DRAWING NO: 170003

RESTRICTED TO: #

CUSTOMER DRAWING

SCALE: NONE

SHEET: 1 OF 1

REV: W1