





C-170002

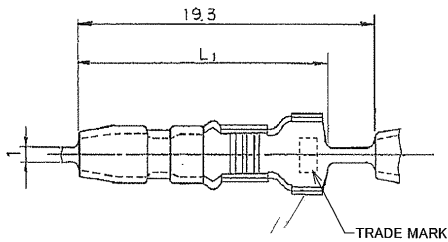

SECT. A-A



SECT. B-B

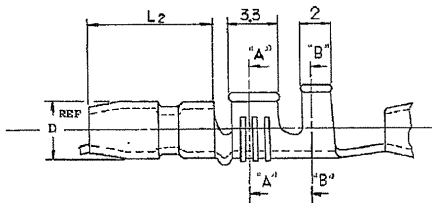

NOTE

- △ THESE ITEMS ARE FOR USE OTHER THAN IN JAPAN.
- △ GENERAL TOLERANCES; ±0.4
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

注記

- △ 海外向け製品。
- △ 一般公差; ±0.4

| 170002-8 | 17.0 | 8.7 | 4.0 | 7000 | 108-5003 | BRASS | PRE-TIN |
|--------------|----------|----------|------|-------|----------|----------|----------------|
| △ 3-170002-4 | 17.0 | 8.7 | 4.0 | 15000 | 108-5003 | PHOS-BZ | POST-TIN |
| △ 3- | -3 | 17.0 | 8.7 | 4.0 | 15000 | -5003 | |
| △ 3- | -2 | 15.8 | 7.3 | 3.5 | 15000 | -5004 | POST-TIN |
| △ 3- | -1 | 15.8 | 7.3 | 3.5 | 15000 | -5004 | PHOS-BZ |
| △ OBSOLETE | 2 | 5 | 17.0 | 8.7 | 4.0 | 20000 | -5003 |
| △ OBSOLETE | 1 | 7 | 15.8 | 7.3 | 3.5 | 25000 | -5004 |
| △ OBSOLETE | 1 | 5 | 17.0 | 8.7 | 4.0 | 25000 | -5003 |
| △ OBSOLETE | 1 | 4 | 17.0 | 8.7 | 4.0 | 20000 | -5003 |
| △ OBSOLETE | 1 | 2 | 15.8 | 7.3 | 3.5 | 20000 | -5004 |
| △ OBSOLETE | 1 | 1 | 15.8 | 7.3 | 3.5 | 20000 | -5004 |
| | -7 | 170020-4 | 15.8 | 7.3 | 3.5 | 7000 | -5004 |
| | -5 | 3 | 17.0 | 8.7 | 4.0 | 5000 | -5003 |
| | -4 | -2 | 17.0 | 8.7 | 4.0 | 7000 | -5003 |
| 170002-2 | 170020-1 | 15.8 | 7.3 | 3.5 | 7000 | 108-5004 | BRASS POST-TIN |

| | | | | | | | |
|------------|---|---|------|-----|-----|-------|-------|
| △ OBSOLETE | 2 | 5 | 17.0 | 8.7 | 4.0 | 20000 | -5003 |
| △ OBSOLETE | 1 | 7 | 15.8 | 7.3 | 3.5 | 25000 | -5004 |
| △ OBSOLETE | 1 | 5 | 17.0 | 8.7 | 4.0 | 25000 | -5003 |
| △ OBSOLETE | 1 | 4 | 17.0 | 8.7 | 4.0 | 20000 | -5003 |
| △ OBSOLETE | 1 | 2 | 15.8 | 7.3 | 3.5 | 20000 | -5004 |
| △ OBSOLETE | 1 | 1 | 15.8 | 7.3 | 3.5 | 20000 | -5004 |

| PART NO. | LOOSE | PCS | NO | DIM | DIM | DIM | QTY/REEL | PROD SPEC NO. | MATERIAL | FINISH |
|----------|-------|-----|----|------|-----|-----|----------|---------------|----------|----------|
| 170002-2 | | | | 15.8 | 7.3 | 3.5 | 7000 | 108-5004 | BRASS | POST-TIN |



| | | |
|--------------------|------------------|------------------|
| WIRE RANGE | INSULATION DIA. | SP (NAME) |
| 25-27mm AWG #14 | 2.5-3.8mm | シニアプラグ |
| (1) (MATERIAL) | (2) (FINISH) | SHUR PLUG |
| SEE TABLE | SEE TABLE | |
| DR: J. [Signature] | CHK: [Signature] | APP: [Signature] |
| REV. R2 | REV. R2 | REV. R2 |

| | | | |
|-----|---------------------------|----|-----|
| R2 | REVISED PER ECO-11-005030 | RK | CHK |
| LTK | REV. INVISION RECORD | DR | CHK |

(CUSTOMER DRAWING) 参考図面