



- 1 MATERIAL: 1/2 HARD BRASS OR NICKEL PLATED STEEL.
 - 2 NO BURRS PERMISSIBLE AT HOLE.
 - 3 MUST BE FLAT WITHIN .003 [0.076] OVER THIS LENGTH.
 - 4 TIN PLATING IS REQUIRED ON BRASS WHEN TEMP. IS OVER 225°F.
 - 5 HOLE MUST BE SYMMETRICAL ABOUT TAB CENTERLINE WITHIN .003 [0.076].
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

1. REPRESENTATIVE FASTON LIF RECEPTACLE INCLUDES 63306 SERIES.
 REPRESENTATIVE POSITIVE LOCK MK111 RECEPTACLES INCLUDES 63854 SERIES.

GLOW WIRE APPROVED MATERIAL, CONTACT TE ENGINEERING FOR SPECIFICATIONS.

MATERIAL: NYLON 66, UL94V-0, WITH UL HWI=0 AT .028[0.71] MINIMUM THICKNESS.

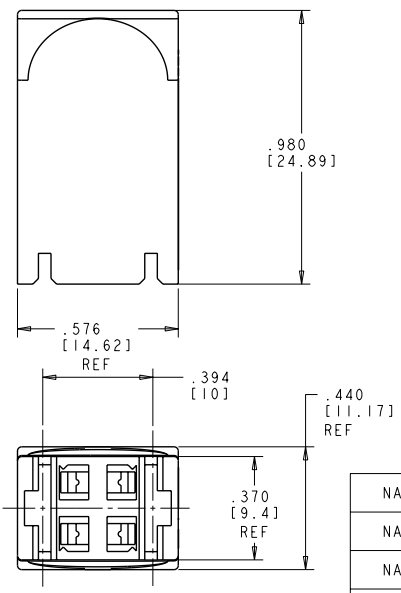

NATURAL		521766-3
NATURAL	NYLON 6, UL94V-2	521766-2
NATURAL	NYLON V0	521766-1
COLOR	MATERIAL	PART NUMBER

DIMENSIONS: INCHES		DATE: 04NOV2004	BY: ELAIG	TYCO ELECTRONICS
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK: 04NOV2004	APP: 04NOV2004	Harrisburg, PA 17105-3608
Ø	F/PC	NAME: HOUSING, RECEPTACLE, FASTON LIF, POSI-LOCK MK111, .250 SERIES		
	F/PC	PRODUCT SPEC		
	F/PC	APPLICATION SPEC		
	F/PC	SHEET: A200779		
	ANGLES	DRAWING NO: C-521766		
MATERIAL: FINISH	WEIGHT	RESTRICTED TO: -		
	CUSTOMER DRAWING	SCALE: 4:1 SHEET 1 OF 3 REV: 3		