

4


3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	02	E2	REVISED PER ECO-11-005027	11MAR11	RK HMR

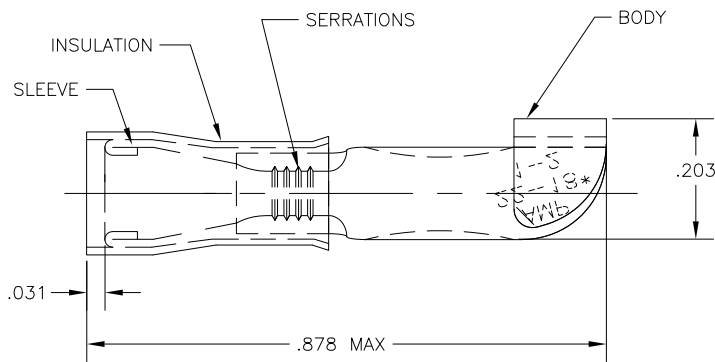

AMP WIRE RANGE	FILE E66717
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

- △ 1 STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPEC MIL-T-7928
COMMERCIAL WIRE RANGE IS 22-16
- 2 WIRE INSUL DIA .080-.125
- △ 3 MATERIAL: BODY - CU PER ASTM B152
SLEEVE - CU PER ASTM B152
INSULATION - NYLON
- △ 4 FINISH: BODY & SLEEVE: TIN PER ASTM B-545
INSULATION - COLOR: RED
- △ 5 SUPERSEDED BY 320555

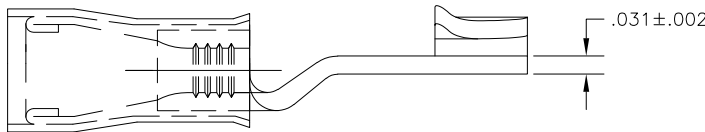

50	LOOSE PIECE, BOX	8-320555-2
2000	ON TAPE	2-320555-1
500	LOOSE PIECE	320555
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12JUN09 jr ruth		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS PRODUCT INFORMATION CENTER 1-800-522-6752	FOR APPLICATION TOOLING ASSISTANCE CENTER TOOLING INFORMATION 1-800-722-1111	VOLTAGE RATING: 300 V MAX	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .008 4 PLC ± - ANGLES ± 5°	CHK 12JUN09 TOM MICHIELUTTI	TE TE Connectivity NAME TERMINAL, P.I.D.G., KNIFE DISCONNECT, WIRE SIZE: 22-16	
FOR ORDER ENTRY 1-800-526-5142		CIRCULAR MIL AREA: 0.26-1.65mm² [509-3260] SOLID OR STRANDED		MATERIAL FINISH	APVD 12JUN09 TOM MICHIELUTTI	PRODUCT SPEC UL 486A	SIZE A3
THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.			- 3	- 4	APPLICATION SPEC -	DRAWING NO C-320555	RESTRICTED TO -
CUSTOMER DRAWING					WEIGHT -	CAGE CODE 00779	SCALE 6:1
						SHEET 1 OF 1	REV E2