
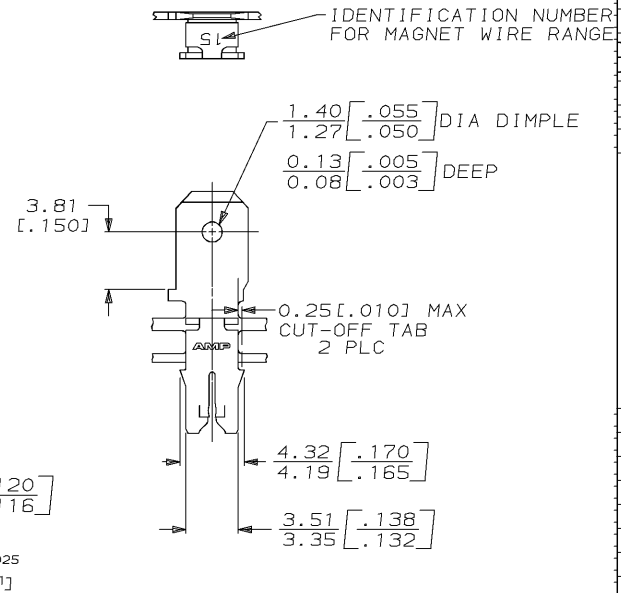
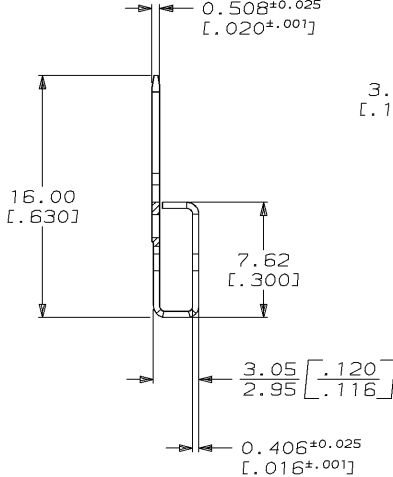


DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS				DATE	APPD
P	F	ZONE	LTR	DESCRIPTION			
AF	50		R	REV PER 0710-0231-94	17/AUG/94	RB/NN	

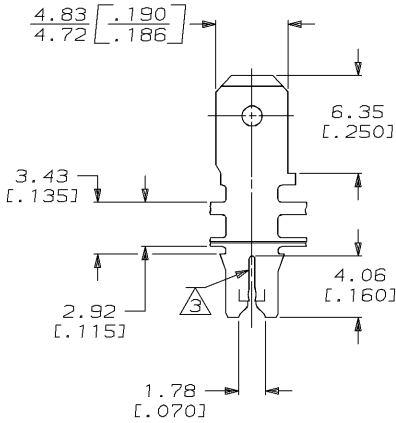

1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59 [.220] CENTERS

△ SLOT TERMINATES A SINGLE MAGNET WIRE ONLY, COPPER 0.64-0.81mm [#22-#20] AWG

2 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED



VARNISH RESIST OVER TIN PL		62511-2
TIN PL 0.002032 [.00080] MIN PER MIL-T-10727		62511-1
FINISH		PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON:	DR 12/4/88 D.E. SCHLUM	AMP AMP INCORPORATED Harrisburg, Pa. 17105 NAME TAB, .187 FASTON™ MAG-MATE™
2 PLC DEC ±	CHK 12/19/89 M.S. FEHER	
3 PLC DEC ± 0.25 (.010)	APPD 12/19/89 N.E. NEFF	
ANGLES ±	APPD 12/19/89 T.L. SHUTTER	
MATERIAL #4M HARD PRE-MILLED BRASS	PRODUCT SPEC 108-2012	SIZE B
FINISH SEE TABLE	APPLICATION SPEC 114-2046	CAGE CODE 00779
WEIGHT -		DRAWING NO 62511
		SCALE 4:1
		SHEET 1 OF 1