
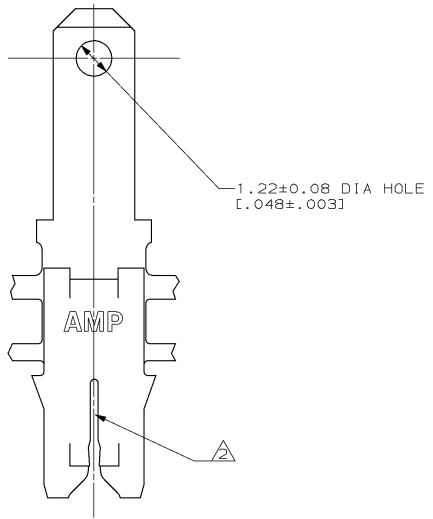
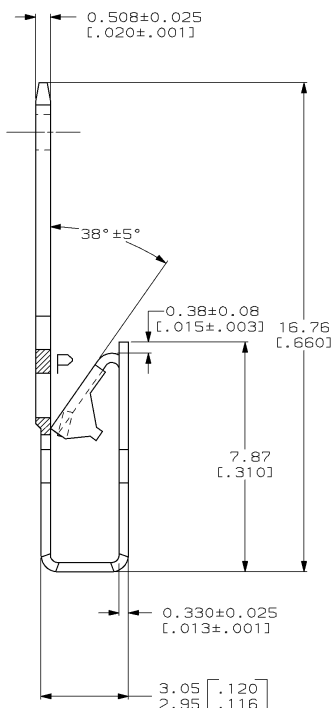


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50				J	REVISE PLATEING 061A-0467-98	12JAN99	HF/KR

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59±0.08 [.220±.003] CENTERS.
 2 SLOTS ACCEPTS EITHER A SINGLE OR DOUBLE MAGNET WIRE OF THE SAME SIZE AND TYPE
 COPPER RANGE: 0.32-0.51mm [#28-#24] AWG
 3 POKE-IN ACCEPTS A 0.5-0.8mm² [#20-#18] AWG SOLID OR FUSED STRANDED LEAD WIRE.
 4 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

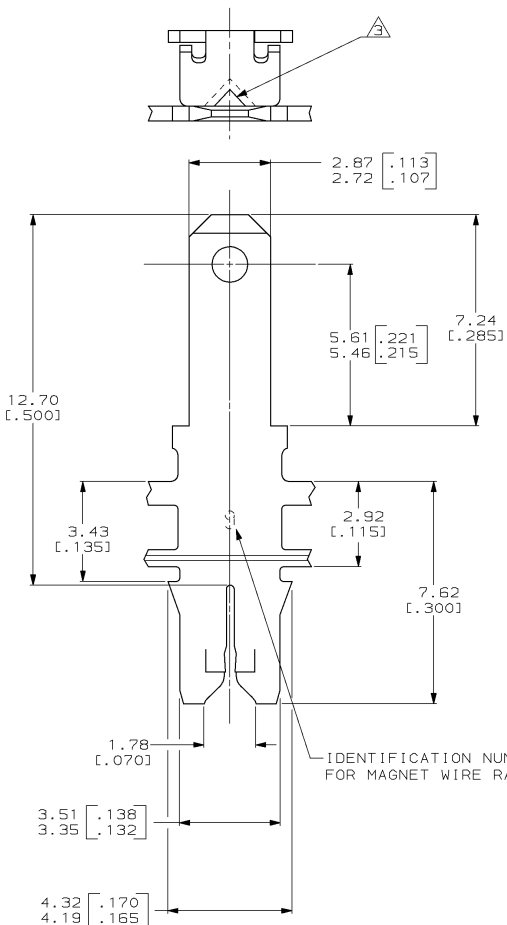

IDENTIFICATION NUMBER 9 FOR MAGNET WIRE RANGE

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 1 PLC DEC ± 0.25 [.010] 2 PLC DEC ± 0.25 [.010] 3 PLC DEC ± 0.25 [.010] ANGLES ± -		DR 9/MAR/95 R. GRZYBOWSKI	63062-1 PART NO	
MATERIAL 4M PRE-MILLED BRASS	APPD 16/MAR/95 M.S.FEHER	NAME AMP Incorporated Harrisburg, PA 17105-3608	TERMINAL, TAB, POKE-IN / 2.79 [.110] FASTON™ COMBINATION, MAG-MATE™	
FINISH 0.002032 [.000080] MIN TIN PLATE	APPD 16/MAR/95 NELSON E. NEFF	SIZE C 00779	CAGE CODE C=63062	DRAWING NO C=63062
WEIGHT -	APPLICATION SPEC 114-2046	SCALE 10:1	SHEET 1 OF 1	