

4

3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LR	DESCRIPTION	DATE	BY
AF	50			
	A1	REVISED PER ECR-09-001883	02FEB09	HMR KR

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59±0.08 [.220±.003] CENTERS.
- 2 SLOT ACCEPTS A SINGLE 0.36-0.57mm [#27-#23] AWG COPPER MAGNET WIRE.
- 3 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 4 PRELIMINARY - NOT FOR PRODUCTION.

IDENTIFICATION NUMBER 10 FOR MAGNET WIRE RANGE

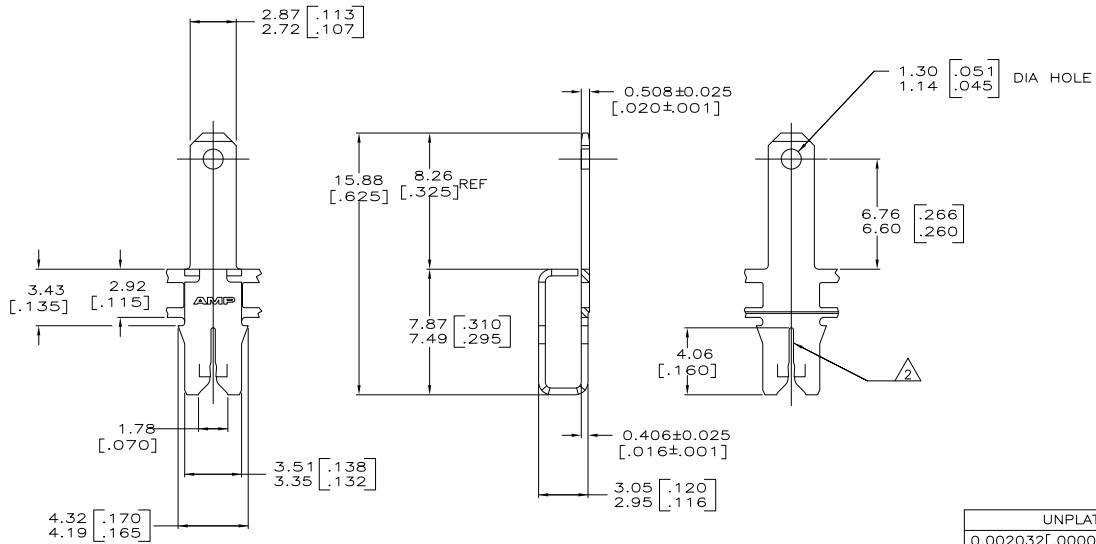

UNPLATED	4	63746-2
0.002032[.00080] MIN TIN		63746-1
FINISH		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW	MICHAEL S. FEHR	17/JAN/04	Tyco Electronics Corporation	
		CHK	PHILLIP M. FORTNEY	13/JAN/04	Harrisburg, PA 17105-3608	
		APPRO	NELSON E. NEFF	15/JAN/04	Tyco Electronics	
DIMENSIONS: mm [INCHES]		PRODUCT SPEC	108-2012	TAB, 2.79 [.110] FASTON™		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	114-2046	MAG-MATE™		
0 PLG	±	SIZE	A2	00779	C=63746	RESTRICTED TO
1 PLG	±	WEIGHT	-			-
2 PLG	± 0.25 (010)	CUSTOMER DRAWING			SCALE	6:1 SHEET 1 of 1 REV A1
3 PLG	±					
4 PLG	±					
ANGLES	±					
MATERIAL	4M HARD BRASS	SEE TABLE				

1471-9 (1/08)

63746

A