
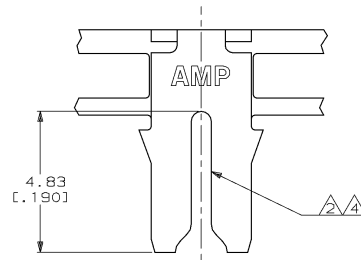
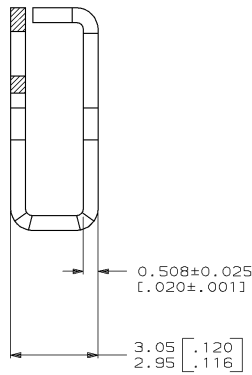
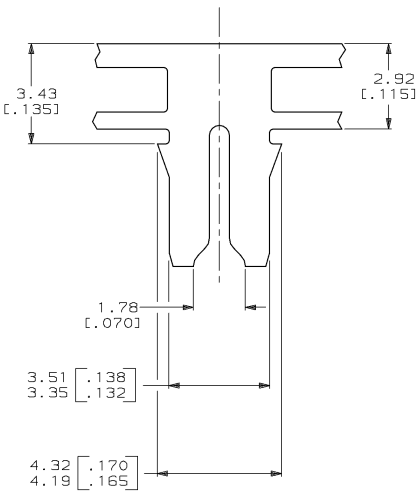


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	REVISIONS	DATE	APPD
AF	50				C	RELEASED PER P.R. 92-61	9/4/92	MF/NN

- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [.330] CENTERS.
- SLOT TERMINATES A SINGLE 0.81-1.02mm [#20-#18] AWG BARE SOLID COPPER WIRE.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- SLOT ALSO TERMINATES A SINGLE 0.81mm [#20] AWG OR A 0.81 [.032] DIA COPPER CLAD STEEL WIRE PER ASTM B452-67 CLASS 40 A.



PROPOSED DESIGN
 NOT RELEASED FOR
 PRODUCTION

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

		62903-1	
		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON + 2 PLC DEC ± 0.25 (.010) 3 PLC DEC ± ANGLES ± -		DR 8/6/93 MICHAEL S. FEHER	
MATERIAL 4M BRASS		CHK - LORI A. MAYER	
FINISH 0.002032 [.000080] MIN TIN PER MIL-T-10727		APPD - NELSON E. NEFF	
APPD - TERRY L. SHUTTER		NAME	
PRODUCT SPEC 108-2012		AMP Incorporated Harrisburg, PA 17105-3608	
APPLICATION SPEC 114-2046		TERMINAL, SPLICE, MAG-MATE™	
WEIGHT -		SIZE C 00779	DRAWING NO C-62903
		SCALE 10:1	SHEET 1 OF 1

62903

A