

4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIBT		REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD		
N		REVISED PER ECR-06-010412	03NOV06	HMR	KR		



- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [.330] CENTERS.
- SLOT TERMINATES A SINGLE MAGNET WIRE, COPPER RANGE IS 0.64-0.81mm [#22-#20] AWG.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

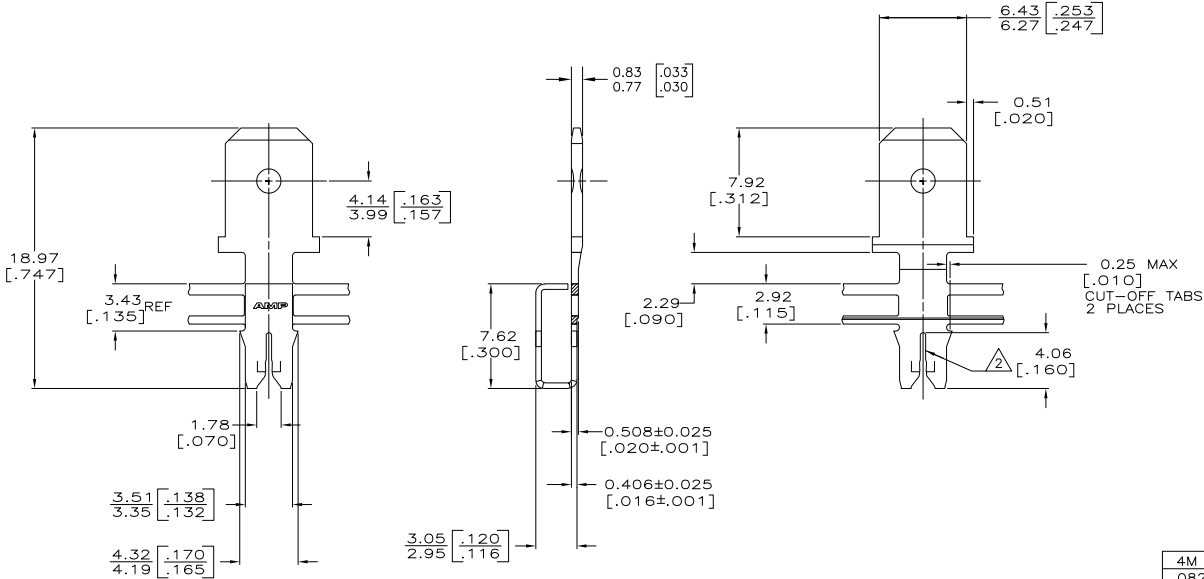

4M HARD PRE-MILLED BRASS	62653-3
082 HARD PRE-MILLED BRASS	62653-2
4M HARD PRE-MILLED BRASS	62653-1
MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW	1/3/92	Tyco Electronics Corporation	
DIMENSIONS: INCHES		OK	1/3/92	Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRW	1/3/92	Tyco Electronics	
0 PLC ± .005		CHK	1/3/92	TAB, 6.35 [.250] FASTON,™	
1 PLC ± .010		APP	1/3/92	MAG-MATE™	
2 PLC ± .015 (0.10)		NAME		SIZE	
3 PLC ± .020				CASE CODE	
4 PLC ± .025				DRAWING NO	
ANGLES ± .5°				RESTRICTED TO	
FINISH				-	
MATERIAL SEE TABLE				A200779C-62653	
FINISH 0.002037 [.000080]				CUSTOMER DRAWING	
				SCALE 5:1 SHEET 1 of 1 REV N	

AMP 1471-9 REV 31MM2000

62653

A