


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	QST	REVISIONS			
TR	LR	DESCRIPTION	DATE	DR	APP
AF	50	M	REVISED PER ECR-06-010412	03NOV06	HMR KR



- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [.330] CENTERS.
- SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRES OF THE SAME TYPE AND SIZE, COPPER RANGE IS 0.36-0.57mm [#27-#23] AWG.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

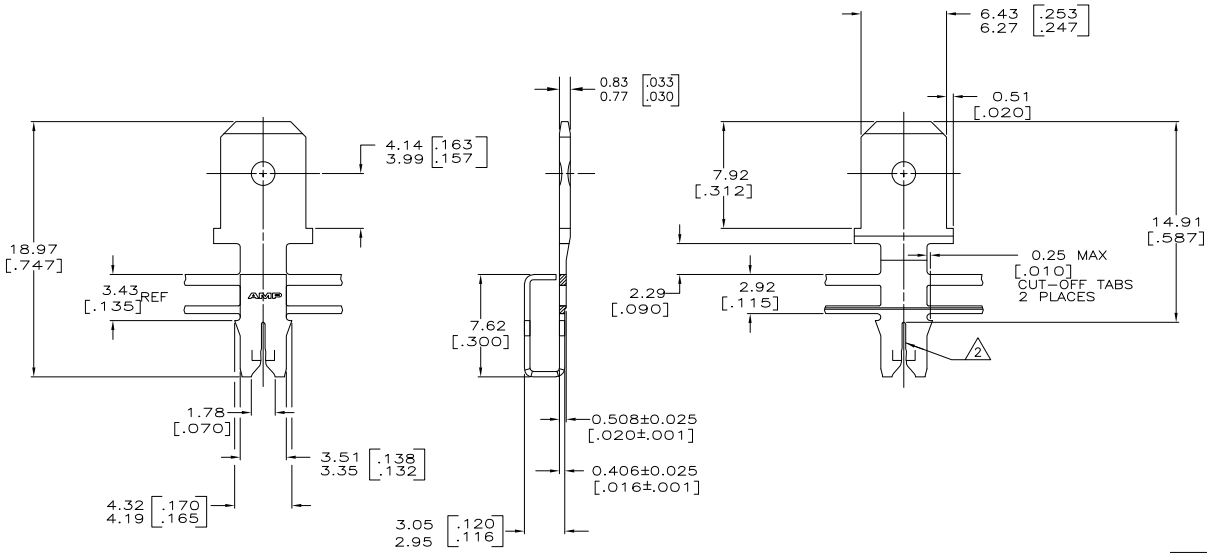

BOX DOWN TAB BACK	62652-2
BOX DOWN TAB FOWARD	62652-1
REELING, LEFT TO RIGHT	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	MICHAEL S. FEHER	1/9/91	Tyco Electronics Corporation Harrisburg, PA 17105-3608
		DR	JEFF R. RUTH	1/14/91	
DIMENSIONS: TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:		APP	NELSON F. NEFF	1/14/91	 TAB, 6.35 [.250] FASTON,™ MAG-MATE™
mm [INCHES]		PRODUCT SPEC			
	Ø P/C	±			APPLICATION SPEC 114-2046
	1 P/C	±			
	2 P/C	± 0.25 [.010]			
	3 P/C	±			
MATERIAL	#2 HARD PRE-MILLED BRASS	FINISH	0.002037 [.000080] MIN TN PER MIL-1-10727	WEIGHT	114-2046
CUSTOMER DRAWING				SIZE	A2
				CAGE CODE	00779
				DRAWING NO	62652
				RESTRICTED TO	M
				SCALE	5:1
				SHEET	1 of 1
				REV	M

AMP 1471-B REV 31MMR2000

62652

A