

4

3


2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	C	REVISED PER ECR-06-010427	04SEP06	HMR	KR		

IDENTIFICATION NUMBER FOR MAGNET WIRE RANGE



- 1 FOR MAG-MATE CAVITY SPECIFICATION
- 2 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON .330 CENTERS.
- 3 AFTER INSERTION INTO PLASTIC HOLDER MAG-MATE MUST BE POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 4 TWO WIRES OF THE SAME SIZE MAX PER SLOT. #22-#20 AWG COPPER MAGNET WIRE RANGE.

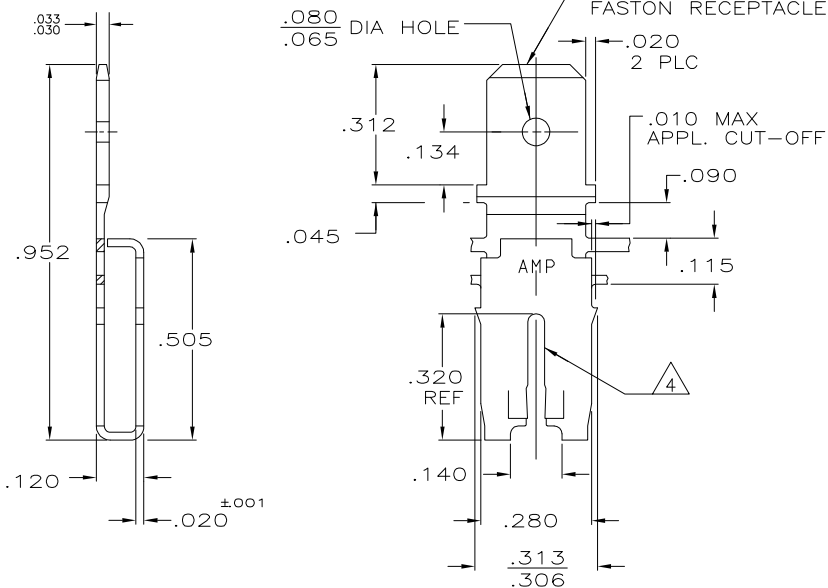

63495-1
PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	M.S. FEHER	5/19/88	 Tyco Electronics Corporation Harrisburg, PA 17105-3608								
DIMENSIONS: INCHES		CHK	P. FORTNEY	5/31/88									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. SWARTZ	5/31/88									
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .010 4 PLC ± - ANGLES ± -		NAME		TAB, .250 FASTON,™ MAG-MATE™									
MATERIAL	#4M HARD PRE-MILLED BRASS	FINISH	VARNISH RESIST, SYNTHETIC OIL OVER .000080 MIN TIN	WEIGHT	114-2066	SIZE	A3	CAGE CODE	00779	DRAWING NO	C-63495	RESTRICTED TO	-
		CUSTOMER DRAWING		SCALE	4:1	SHEET	1	OF	1	REV	C		

AMP 1470-19 REV 31MAR2000