

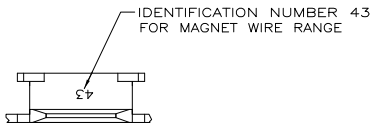
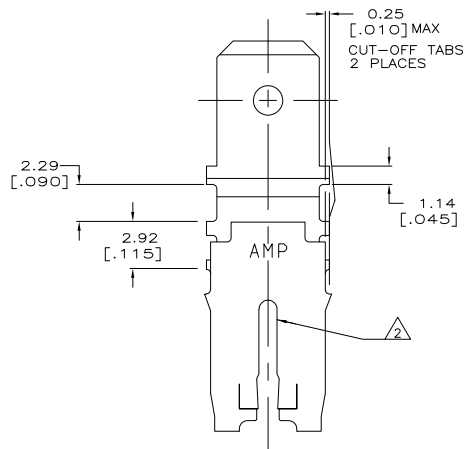


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	QST	REVISIONS			
TR	LR	DESCRIPTION	DATE	DR	APP
AF	50				
	C	REVISED PER ECR-06-010515	29AUG06	HMR	KR

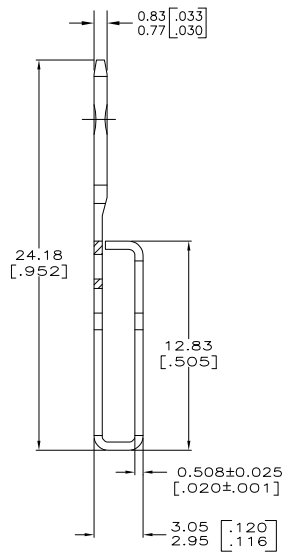

- 1 VARNISH RESIST OVER 0.002032[.000080] MIN TIN PER MIL-T-10727
- 2 SLOT ACCEPTS 1.61-1.83mm [#14-#13] AWG COPPER MAGNET WIRE. TWO 1.61mm [#14] AWG COPPER MAGNET WIRES ACCEPTABLE AT CAVITY ANVIL HEIGHT OF 3.94-4.19 [.155-.165].
- 3 AFTER INSERTION INTO PLASTIC HOLDER MAG-MATE MUST BE POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

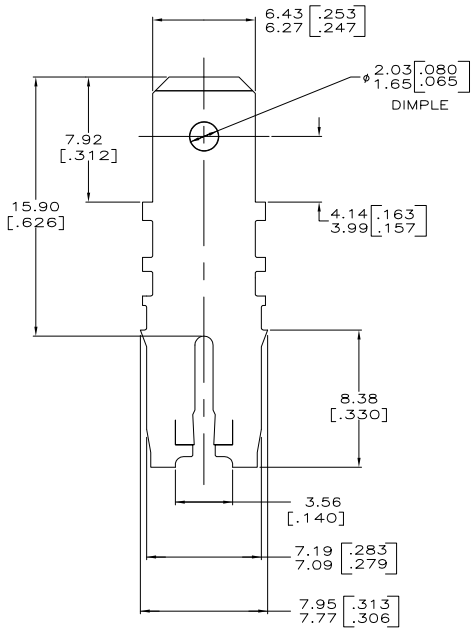

63883-1  
PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN R.GRZYBOWSKI 24/05/93	DATE 24/05/93	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		DR M.S. FEHER 24/05/93	DATE 24/05/93	TAB, LOOSE PIECE, 6.35 [.250] FASTON, MAG-MATE™	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APR NELSON F. NEFF 24/05/93	DATE 24/05/93	PRODUCT SPEC 108-2053	
MATERIAL 4M PRE-MILLED BRASS		FINISH 1	APPLICATION SPEC 114-2066	SIZE A2	QTY 00779
		WEIGHT -	DRAWING NO 63883	SCALE 6:1	SHEET 1 of 1
		CUSTOMER DRAWING	REV C	RESTRICTED TO	

AMP 1471-B REV 31MMR2000

63816