


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	QTY	REV	DESCRIPTION	DATE	BY	APP
AF	50					
		K	REVISED PER ECR-06-010412	03NOV06	HMR	KR



- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [.330] CENTERS.
- SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRES OF THE SAME TYPE AND SIZE, COPPER RANGE IS 0.25-0.32mm [#30-#27] AWG.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

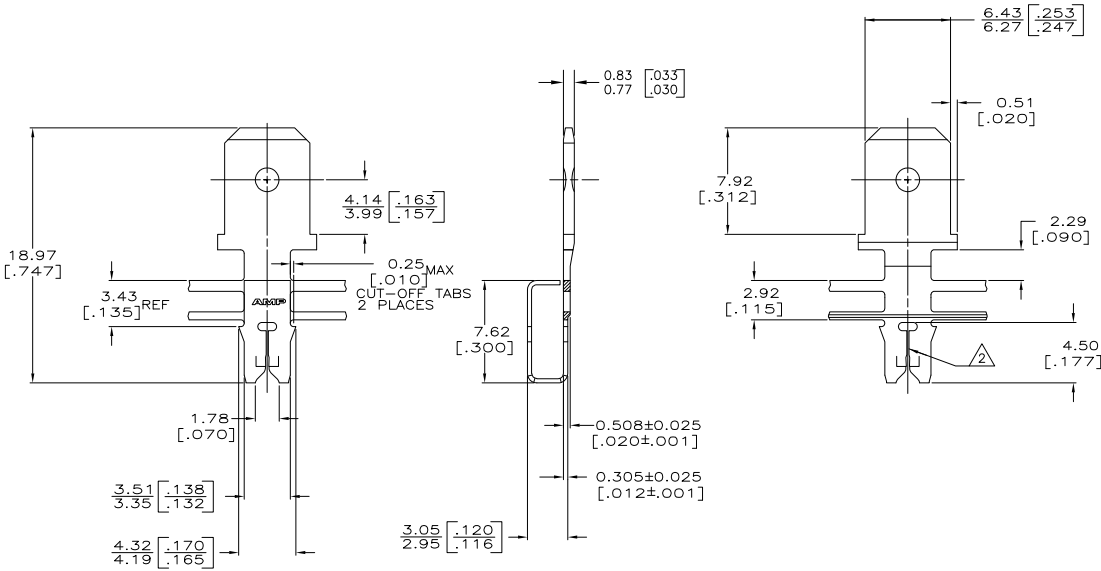

62651-1
PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		BY MICHAEL S. FEHER 12/12/99	Tyco Electronics Corporation Harrisburg, PA 17105-3608
		CHK NEFF R. RUTH 12/20/99	
DIMENSIONS: TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:		APP NELSON F. NEFF 12/20/99	62651-1
mm [INCHES]		PRODUCT SPEC	TAB, 6.35 [.250] FASTON™ MAG-MATE™
Ø P L C ± -		APPLICATION SPEC	
1 P L C ± 0.25 [.010]		114-2046	SIZE A2 CASE CODE 00779 DRAWING NO 62651
Ø P L C ± -		WEIGHT	RESTRICTED TO
MATERIAL #2 HARD PRE-SALTED BRASS	FINISH 0.002037 [.000080] MIN TN PER ML-1-10727	CUSTOMER DRAWING	SCALE 5:1 SHEET 1 of 1 REV K

AMP 1471-B REV 31MM2000

62651

A