

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIBT		REVISIONS			
F	LTR	DESCRIPTION	DATE	BY	APP'D		
AF	50						
		D	REVISED PER ECR-06-010412			08NOV06	HMR KR



- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 ± 0.08 $[\.330 \pm .003]$ CENTERS.
- SLOT TERMINATES EITHER A SINGLE OR DOUBLE MAGNET WIRE OF THE SAME TYPE AND SIZE, COPPER RANGE; $0.25-0.36\text{mm}$ $[\#30-\#27]$ AWG.
- AFTER INSERTION INTO PLASTIC HOLDER, TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

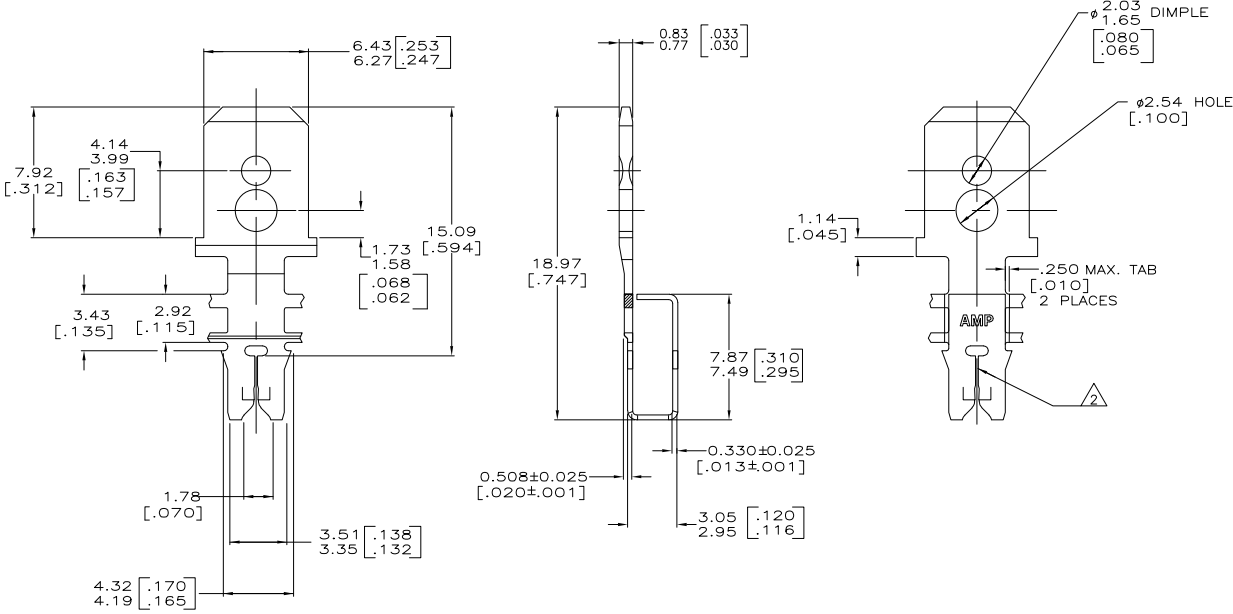

63328-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	R. GRZYBOWSKI	1MAY98	Tyco Electronics Corporation	
		CHK	M. S. FISHER	1MAY98	Harrisburg, PA 17105-3608	
		APPC	G. PORTA	1MAY98	TERMINAL, TAB 6.35[.250] FASTON, MAG-MATE	
		PRODUCT SPEC	108-2012			
		APPLICATION SPEC	114-2046			
		WEIGHT	-	SIZE	A2	00779 C=63328
MATERIAL		FINISH	0.002032(0.000080) MIN	CUSTOMER DRAWING		RESTRICTED TO
OR2 PRE-MILLED BRASS			TIN PER ML-T-01727	SCALE	6:1	SHEET 1 of 1 REV D

AMP 1471-9 REV 31MM2000