

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LR	DESCRIPTION	DATE	BY	APPD
AF	50				
	K2	REVISED PER ECO-11-004917	11MAR11	RK	HMR

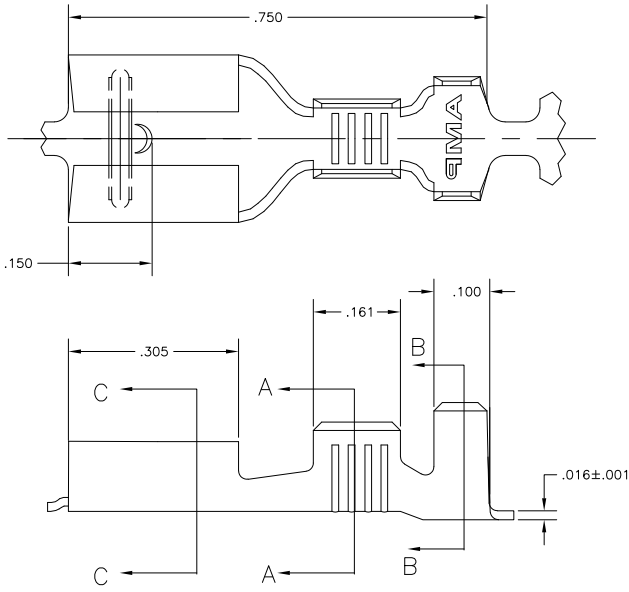

- 1 CONTINUOUS STRIP ON REELS
- 2 ACCEPTS #18-#14 AWG WIRE SIZE
- 3 INSULATION RANGE IS .120-.170 DIA
- 4 MATING TAB THK IS .032±.001.

.000080 MIN TIN	42400-2
-	42400-1
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	JR_RUTH	21AJUN02				
DIMENSIONS: INCHES		CHK	DESANTIS	21AJUN02				
OTHER DIMENSIONS: MILLIMETERS		P	DESANTIS	21AJUN02				
0 PLC ± .010 1 PLC ± .015 2 PLC ± .020 3 PLC ± .030 4 PLC ± .040 ANGLES ± .5°		APPD	DESANTIS	21AJUN02				
MATERIAL	4M BRASS	FINISH	SEE TABLE	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				WEIGHT	A2	00779	C=42400	
				CUSTOMER DRAWING	SCALE	8:1	SHEET	1 of 1
								REV
								K2

1471-9 (3/11)

42400

A