

4

3




2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N2	REVISED PER ECO-11-004820	11MAR11	RK	HMR

- ① SUFFIX LETTER MUST BE USED ONLY WHEN ORDERING APPLICATOR TOOLING FOR STEPPED UP VERSION.
- ② CONTINUOUS STRIP ON REELS.
- ③ FOREIGN PRODUCTION ONLY.
- 4 WIRE SIZE IS 0.8-2.0mm<sup>2</sup>, [18-14] AWG
- 5 INSULATION RANGE IS 3.05-4.32 [.120-.170] DIA

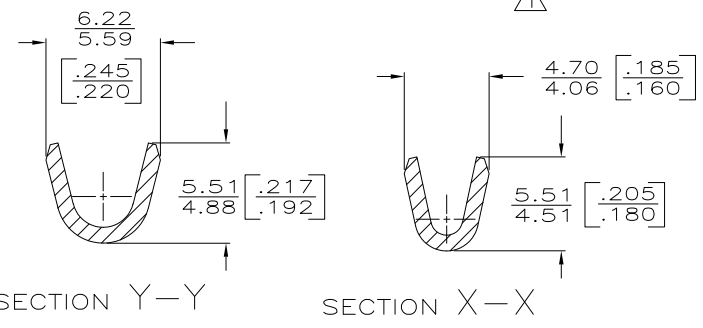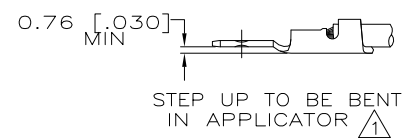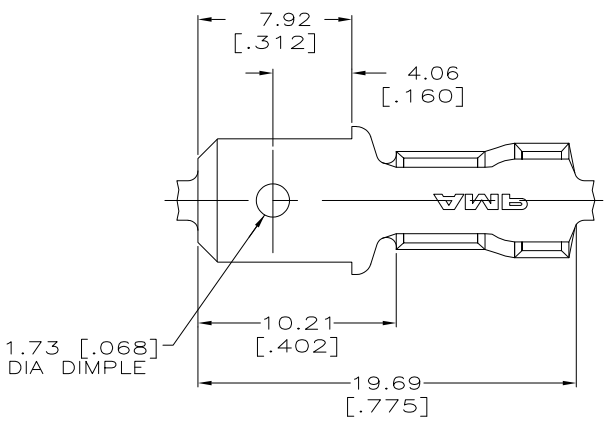

OBSOLETE

41411 B	SILVER	41411-1	③
TERMINAL NUMBER STEPPED UP	FINISH	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	2/5/92	 TE Connectivity TAB, FASTON, 6.35 [.250] SERIES	RESTRICTED TO								
DIMENSIONS: INCHES		CHK	MS FEHER	2/5/92										
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	D REINER	1/5/92			NAME							
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.38 [.015] 4 PLC ± - ANGLES ± -		PRODUCT SPEC		SIZE			CAGE CODE	DRAWING NO						
MATERIAL	OB2 BRASS	FINISH	SEE TABLE	WEIGHT	-	A3	00779	C-41411	SCALE	5:1	SHEET	1 of 1	REV	N2