


DO NOT SCALE  
DIMENSIONS IN mm

METRIC



NOTES:

- △ FOR USE ON MINIATURE APPLICATORS ( LEFT-RIGHT FEED ) AND STANDARD APPLICATORS ( RIGHT-LEFT FEED ).
- △ BRASS ACC ASTM B36 ALLOY 260.
- △ PH.BRONZE ACC ASTM B103.
- △ GAGE 0.71 MUST NOT ENTER ; GAGE 0.51 MUST ENTER.
- 5 REELED WITH PAPER COVER
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

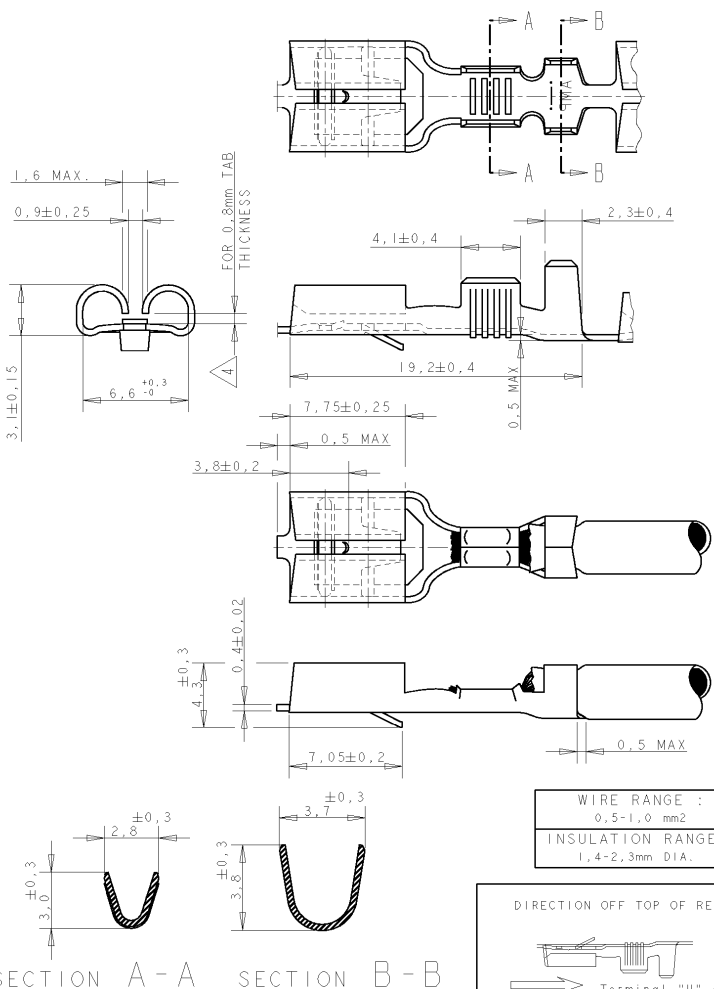

GENERAL TOLERANCES ±0.3

6 OBSOLETE	△	PRE-TINPLATED	PH. BRONZE	<del>6-160860-8</del>
	△	PRE-TINPLATED	BRASS	<del>6-160860-7</del>
	△	TINPLATED	PH. BRONZE	160860-4
	△	UNPLATED	PH. BRONZE	160860-3
	△	TINPLATED	BRASS	160860-2
	△	UNPLATED	BRASS	160860-1

NOTES	FINISH	MATERIAL	PARTNUMBER
-	-	-	-
CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED.			
© COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.			
THIS DRAWING IS UNPUBLISHED			
AMP Tyco Electronics AMP Barcelona, Spain			
NAME .250 SRS FAST-IN-ON RECEPTACLE			
LTR.	REVISION RECORD	DR.	CHK. DATE
DR. : P. BEIJNON	CHK. : A. BLJNEN	APP. : L. SOEST	DWG. No. 160860
DATE: 14-03-90	DATE: -	DATE: 18-04-90	REV. LTR. D1
			SHEET 1 of 1
			A3

R6-128 (REV. 04-91) 8 7 6 5 4 3 2 1