


NUMERO 790 319	DIBUJADO EN PROYECCIONES	AMERICANAS EUROPEAS	REV	DESCRIPTION	DATE	DW	APPV
			F1	REVISED PER ECO-10-000445	22JAN10	KK	HMR
			G	SEE ECR-11-006271	25MAR11	JS	LB

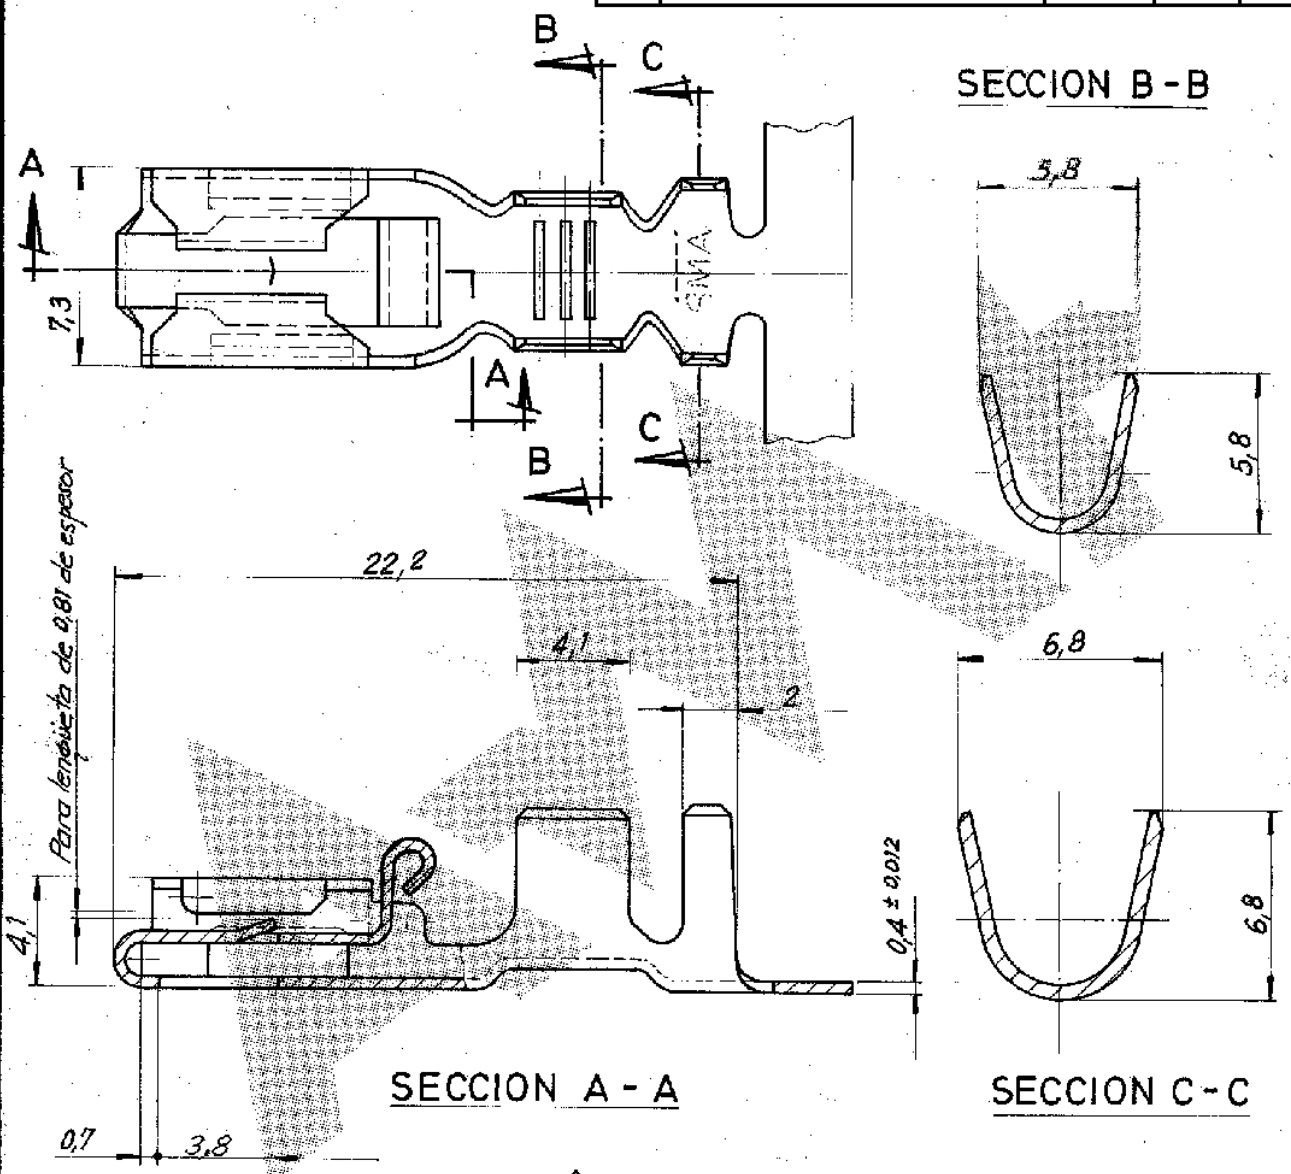

- ① OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- ② WIRE CRIMP 6500 CMA MINIMUM

Tolerancia general  $\pm 0,38 / \pm 1^\circ$

**PLANO DE CLIENTE SOLO PARA REFERENCIA**

OBS	790319-6	LATON	PLATEADO
OBS	790319-7	BRONCE FOSF.	PLATEADO
⚠	790319-6	BRONCE FOSF.	PLATEADO
	790319-5	BRONCE FOSF.	PRE-ESTANADO
	790319-4	BRONCE FOSF.	
	790319-3	Laton	Pre-estánado
	790319-1	Laton	

GAMA HILO 3,3-6m/m <sup>2</sup>			GAMA AISLANTE 3A-5,1mm <sup>2</sup>		PRIMER USO
ESCALA	LOC	AL	A	N.º	790 319
NOMBRE					REV. G
RECEPTACULO POSITIVE LOCK					



LOCC  
AL  
DIST.  
2