


DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50	B		REL PER 063A-0408-01	27/JUN/01	JR JH

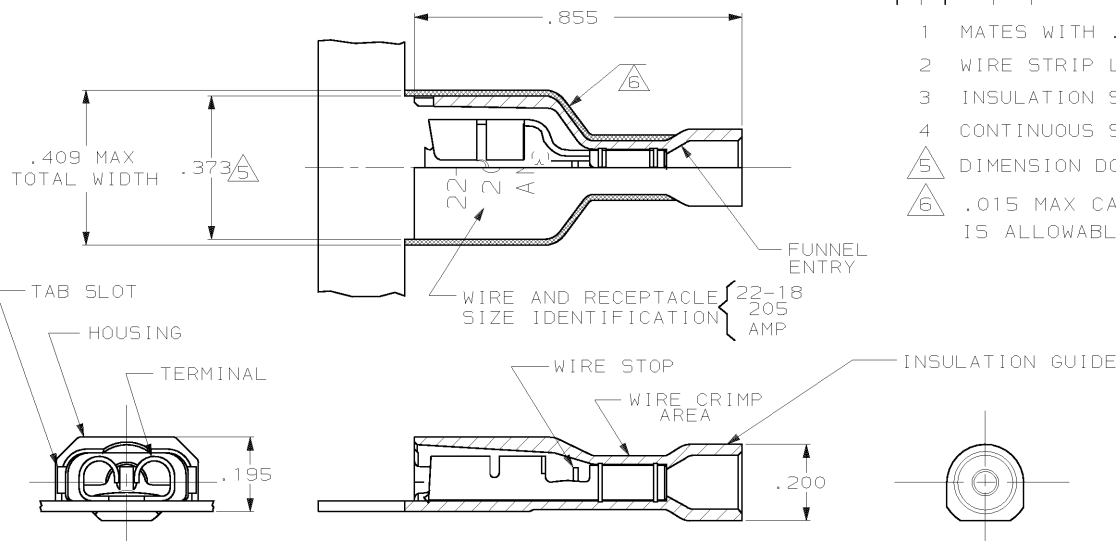

- 1 MATES WITH .032±.001x.205 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

STANDARD	HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD BRASS, TIN .000080 MIN	2-521308-2
PACKAGING	MATERIAL & FINISH	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2. PLC DEC ± 3. PLC DEC ± 0.38(.015) ANGLES ± -	DR 25MAY00 JR RUTH CHK 25MAY00 MS FEHER APPD 25MAY00 J HUMMEL APPD 25MAY00 J HUMMEL	AMP INCORPORATED Harrisburg, Pa. 17105
MATERIAL SEE TABLE	PRODUCT SPEC 108-2043	NAME RECEPTACLE ASSY, ULTRA-FAST, .205 SERIES, 22-18 AWG
FINISH SEE TABLE	APPLICATION SPEC 114-2123	SIZE B
WEIGHT -		FSCM NO 00779
		DRAWING NO 521308
		SCALE 4:1
		SHEET 1 OF 1

AMP 1470-15 REV 3-87
 25-MAY-00 12:36:33 amp13469 /ws/tesp/u.jr-proposals

CUSTOMER DRAWING