




DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 1999
 © COPYRIGHT 1999 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50			K	REV PER 061A-0145-99	3/10/99	JR/JH

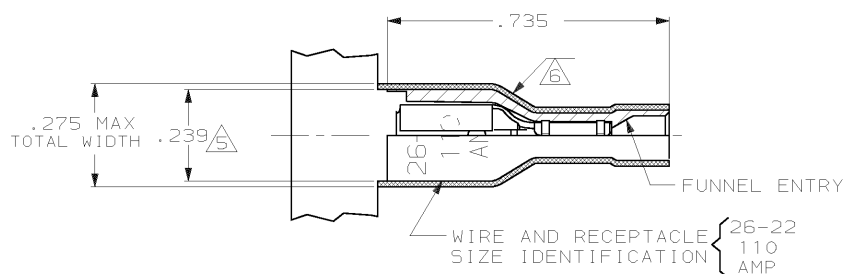

- 1 MATES WITH .020±.001 X .110 OR .125 TABS.
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .100 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

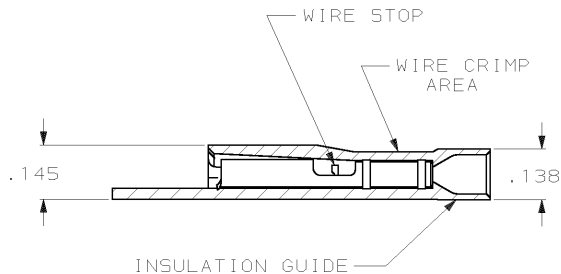

HOUSING: NYLON, COLOR-VIOLET TINT		7-520365-2	
RECEPTACLE: #3 HARD BRASS, TIN .000080 MIN		PART NO	
MATERIAL & FINISH		AMP INCORPORATED Harrisburg, Pa. 17105	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2. PLC DEC ± 3. PLC DEC ± .015 ANGLES ±		NAME RECEPTACLE ASSY, ULTRA-FAST, .110/.125 SERIES, 26-22 AWG	
MATERIAL SEE TABLE		SIZE B	
FINISH SEE TABLE		FSCM NO 00779	
DR 11/14/88 P FORNEY CHK 11/15/88 MS FEHER APPD 11/15/88 K RANDOLPH APPD 11/15/88 TL SHUITER		DRAWING NO 520365	
PRODUCT SPEC 108-2043		SCALE 4:1	
APPLICATION SPEC 114-2123		SHEET 1 OF 1	
WEIGHT -			

AMP 1470-15 REV 3-87
 03-JUN-99 13:03:42 amp13469 /home/amp13469/edimmod

CUSTOMER DRAWING