


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C1		REVISED PER ECO-11-004820	11MAR11	RK	HMR

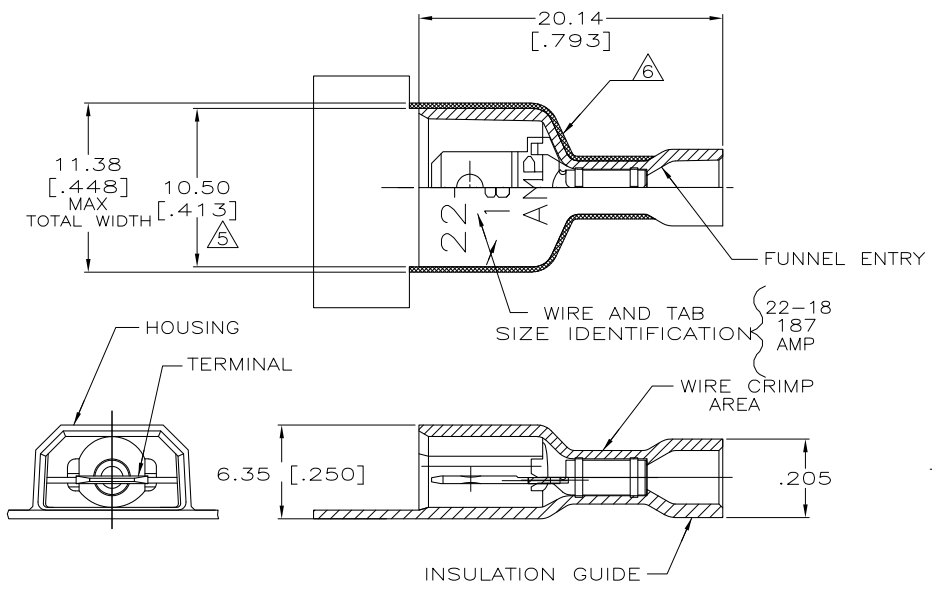

- 1 TAB DIMENSIONS .020±.001x.187
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-RED TRANSLUCENT TAB: #3 HARD BRASS, TIN .000080 MIN	2-521102-2
MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	9/25/95	TE Connectivity TAB ASSEMBLY, ULTRA-FAST, 4.75 [.187] SERIES, 22-18 AWG
DIMENSIONS: mm [INCHES]		CHK	9/25/95	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	9/25/95	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.38 [.015] 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME		
MATERIAL	FINISH	PRODUCT SPEC		RESTRICTED TO
SEE TABLE	SEE TABLE	APPLICATION SPEC		
		108-2017		SIZE
		114-2123		CAGE CODE
		WEIGHT -		DRAWING NO
		CUSTOMER DRAWING		A3 00779 C=521102
		SCALE 4:1		SHEET 1 of 1
		REV C1		