


DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 1999
 © COPYRIGHT 1999 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50			F	REV PER OG1A-0147-99	3/10/99	JR/JH

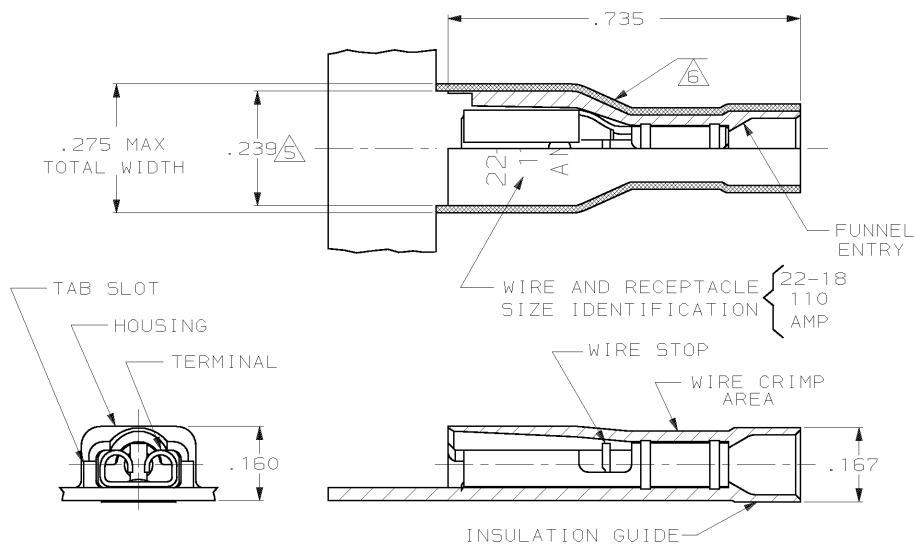

- 1 MATES WITH .032±.001X.110 OR .125 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION RANGE .060-.120
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-RED TRANSLUCENT		2-520979-2	
RECEPTACLE: #3 HARD BRASS TIN PL .000080 MIN THK		PART NO	
MATERIAL & FINISH		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± 3 PLC DEC ± .015 ANGLES ± -	DR 10/5/90 JR RUTH	AMP AMP INCORPORATED Harrisburg, Pa. 17105 NAME RECEPTACLE ASSEMBLY, ULTRA-FAST PLUS, .110/.125 SERIES, 22-18 AWG	
	CHK 10/5/90 P FORTNEY		
	APPD 10/5/90 D BRATINA		
	APPD 10/5/90 R KUZO		
MATERIAL SEE TABLE	PRODUCT SPEC 108-2044	SIZE B	FSCM NO 00779
FINISH SEE TABLE	APPLICATION SPEC 114-2123	SCALE 5:1	DRAWING NO 520979
	WEIGHT -		SHEET 1 OF 1

AMP 1470-15 REV 3-87
 03-JUN-99 14:17:00 amp13469 /home/amp13469/edimmod

CUSTOMER DRAWING