

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	J1	REVISED PER ECO-11-005027	14MAR11	RK HMR

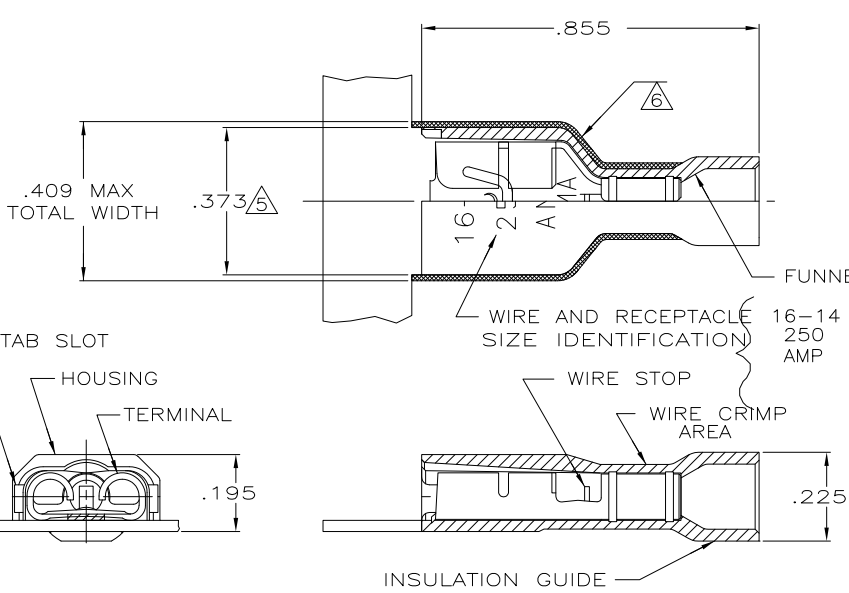

- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .160 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-BLUE TRANSLUCENT  
 RECEPTACLE: #3 HARD PHOS BRONZE  
 TIN PL .000080 MIN THK

3-520116-2

MATERIAL & FINISH PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	10/18/88		 TE Connectivity
DIMENSIONS:		CHK	10/18/88		
INCHES		APVD	10/21/88		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
0 PLC	± -	K RANDOLPH			RECEPTACLE ASSY, ULTRA-FAST, .250 SERIES, 16-14 AWG
1 PLC	± -	PRODUCT SPEC			
2 PLC	± -	108-2043			
3 PLC	± .015	APPLICATION SPEC			SIZE
4 PLC	± -	114-2123			CAGE CODE
ANGLES	± -	WEIGHT			DRAWING NO
MATERIAL	SEE TABLE	A3			00779
FINISH	SEE TABLE	C-520116			RESTRICTED TO
		CUSTOMER DRAWING			SCALE
		4:1			SHEET
		1 OF 1			REV
		J1			