

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	H1	REVISED PER ECO-11-004917	11MAR11	RK HMR

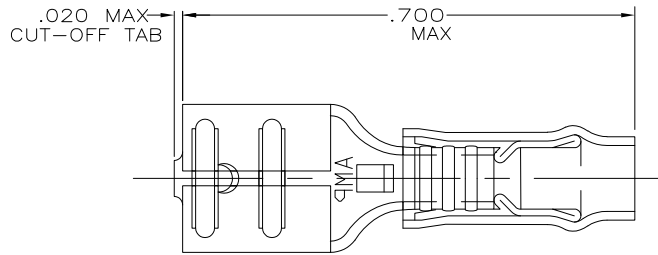

- 1. INSULATION DIA .082 MAX
- 2. FITS TAB THK .020±.001

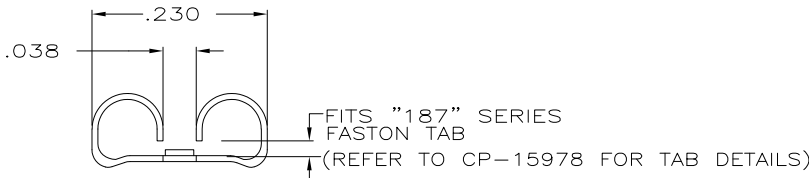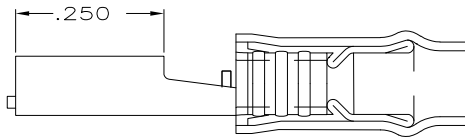

-	-	-
100	LOOSE PC,BOX	8-641321-1
-	TAPE MOUNTED	641321-2
-	LOOSE PIECE	641321-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: -	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L OLMEDA 26JUN95			RECEPTACLE, 187 SERIES, FASTON™, PIDG™ 26-24			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .015 3 PLC ± - 4 PLC ± - ANGLES ± -	CHK M ELLIS 26JUN95			APVD B BARE 26JUN95	NAME	SIZE	CAGE CODE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: -			MATERIAL BODY,BRASS .016 SLV,NYLON,COLOR,YELLOW	FINISH BODY,TIN	WEIGHT	A3	00779	641321	-
FOR ORDER ENTRY	1-800-526-5142				CUSTOMER DRAWING		SCALE	NTS	SHEET	1 OF 1	REV H1

1470-19 (3/11)