

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	REV PER 063A-0176-02	08APR02	JR	TM

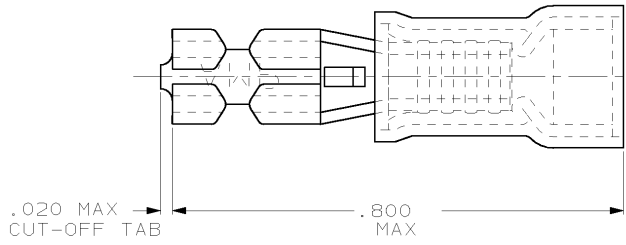

- 1. INSULATION DIA .170 MAX
- 2. FITS TAB .032 THK

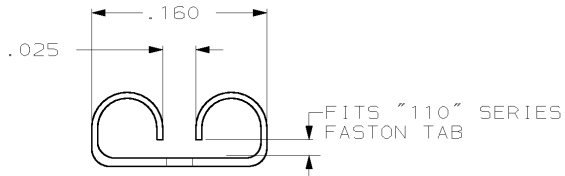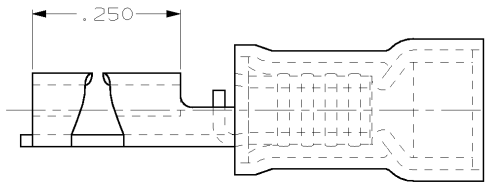

100	LOOSE PC, BOX	8-640931-1
-	TAPE MOUNTED	640931-2
-	LOOSE PIECE	640931-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: -	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	DWN L OLMEDA 13NOV95 CHK M ELLIS 15NOV95 APVD B BARE 15NOV95	AMP AMP Incorporated Harrisburg, PA 17105-3608
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS 1-800-522-6752	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -	DIMENSIONS: INCHES 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±.015 3 PLC ±- 4 PLC ±- ANGLES ±-	NAME RECEPTACLE, 110 SERIES, FASTON™, PID6™, WIRE SIZE, 16-14 AWG
FOR APPLICATION TOOLING INFORMATION 1-800-722-1111	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: -	MATERIAL BODY, BRASS .016 SLV, NYLON, COLOR, BLUE	FINISH BODY, PRE-T1N	SIZE A3 CAGE CODE 00779 DRAWING NO. 640931
FOR ORDER ENTRY 1-800-526-5142					CUSTOMER DRAWING SCALE NTS SHEET 1 OF 1 REV G

AMP 1470-19 REV 09MAY94
 23 JAN 1996 08:21:39 AMP12368 <UUI28A>DEPT1132-U, DWG1132-U, RBY-U, FASTON-U, CUST