

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N2	REVISED PER ECO-11-004917	11MAR11	RK	HMR






1. WIRE INSULATION DIA .100 MAX

2. FITS TAB THK .020±.001

3 SUPERSEDED BY 61060-1

4 SUPERSEDED BY 8-61060-1

5 MATERIAL & FINISH:
BODY - BRASS - PRE TIN PLATE
SLEEVE - NYLON, COLOR-SEE TABLE

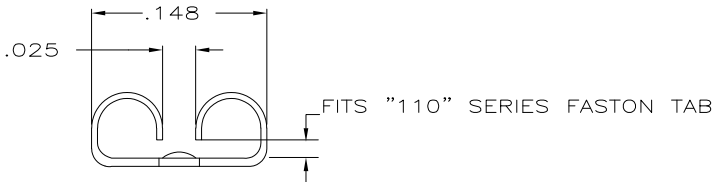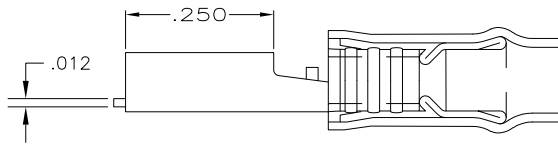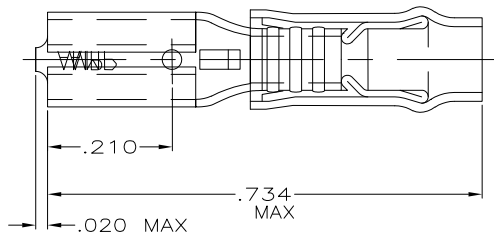

4	TRANSPARENT	50	LOOSE PIECE,BAG	8-61060-5
4	TRANSPARENT	5	LOOSE PIECE,BLS	8-61060-4
	TRANSPARENT	100	LOOSE PIECE,BOX	8-61060-1
3	BLACK	-	LOOSE PIECE	61060-3
	TRANSPARENT	5000	ON TAPE	61060-2
	TRANSPARENT	1000	LOOSE PIECE	61060-1
	INSULATION COLOR	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L OLMEDA 13NOV95	TE Connectivity	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 300V MAX	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK M ELLIS 13NOV95	RECEPTACLE, 110 SERIES, FASTON, PIDG, WIRE SIZE: 22-18	
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 0.26-1.65mm² [509-3260] STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± .015 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD B BARE 13NOV95	NAME	RESTRICTED TO
TOOLING INFORMATION	1-800-722-1111		MATERIAL	FINISH	PRODUCT SPEC	SIZE A3	CAGE CODE 00779
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	5	5	APPLICATION SPEC	DRAWING NO C-61060	SCALE 1:1
					WEIGHT		SHEET 1 of 1
					CUSTOMER DRAWING		REV N2