

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
AF	50	M1	REVISED PER ECO-11-004587	11MAR11	RK HMR	

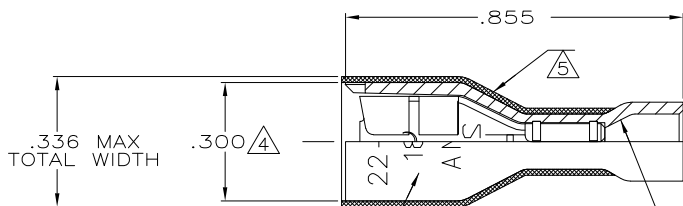

- 1 MATES WITH .020±.001x.187 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 DIMENSION DOES NOT INCLUDE TRIM BURR
- 5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA



.010 MAX CUT-OFF TAB

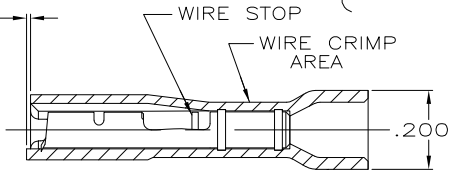

INSULATION GUIDE

WIRE AND RECEPTACLE SIZE IDENTIFICATION } 22-18
187 AMP

FUNNEL ENTRY

HOUSING: NYLON, COLOR-RED TRANSLUCENT	2-520182-2
RECEPTACLE: #3 HARD BRASS TIN PL .000080 MIN THK	

MATERIAL & FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P FORTNEY 10/7/88	TE Connectivity		
DIMENSIONS: INCHES		CHK MS FEHER 10/10/88			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K RANDOLPH 10/10/88	NAME		
0 PLC ± -		PRODUCT SPEC	RECEPTACLE ASSY, ULTRA-FAST, LOOSE PIECE, 187 SERIES, 22-18 AWG		
1 PLC ± -		108-2043	RESTRICTED TO		
2 PLC ± -		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
3 PLC ± .015		114-2123	A3	00779	C=520182
4 PLC ± -	FINISH	WEIGHT	CUSTOMER DRAWING		
ANGLES ± -	SEE TABLE	SCALE	4:1		
MATERIAL		SHEET		1 OF 1	
SEE TABLE		REV		M1	