

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
G	14	G1		REVISED PER ECO-11-004917	11MAR11	RK	HMR

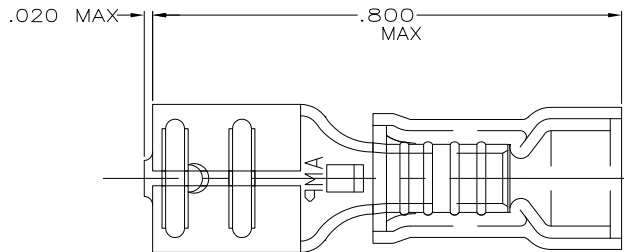

- 1. INSULATION DIA .170 MAX
- 2. FITS TAB .020 THK

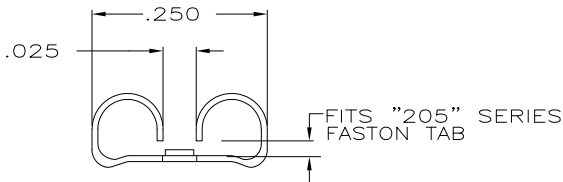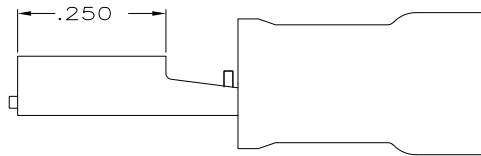

100	LOOSE PC,BOX	8-640913-1
-	TAPE MOUNTED	640913-2
-	LOOSE PIECE	640913-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: -	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L OLMEDA 26JUN95	TE Connectivity <b>RECEPTACLE, 205 SERIES, FASTON, PIDG, WIRE SIZE, 16-14 AWG</b>	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .015 3 PLC ± - 4 PLC ± - ANGLES ± -	CHK M ELLIS 26JUN95		
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: -			APPLICATION SPEC		SIZE
FOR ORDER ENTRY	1-800-526-5142		MATERIAL BODY, BRASS .016 SLV, NYLON, COLOR, BLUE	FINISH BODY, TIN	WEIGHT	RESTRICTED TO	A3 00779 C-640913 CUSTOMER DRAWING SCALE NTS SHEET 1 OF 1 REV G1