

4


3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	J1	REVISED PER ECO-11-004587	11MAR11	RK HMR

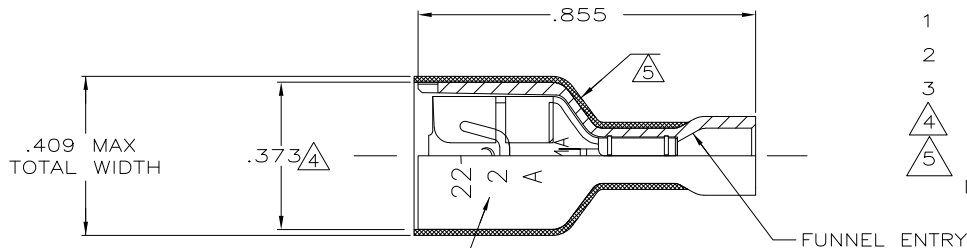

- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 DIMENSION DOES NOT INCLUDE TRIM BURR
- 5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

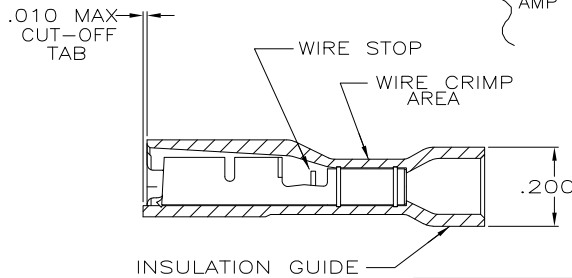

HOUSING: NYLON, COLOR-RED TRANSLUCENT	2-520184-4
RECEPTACLE: #3 HARD PH BRONZE, TIN .000080 MIN	
HOUSING: NYLON, COLOR-RED TRANSLUCENT	2-520184-2
RECEPTACLE: #3 HARD BRASS, TIN .000080 MIN	
MATERIAL & FINISH	
PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	10/18/88	 TE Connectivity	NAME	RESTRICTED TO
DIMENSIONS:		CHK	10/18/88			
INCHES		APVD	10/21/88			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		K RANDOLPH		SIZE	CAGE CODE	DRAWING NO
0 PLC	± .-	PRODUCT SPEC		A3	00779	C=520184
1 PLC	± .-	APPLICATION SPEC		WEIGHT	-	
2 PLC	± .-	114-2123		CUSTOMER DRAWING	SCALE	4:1
3 PLC	± .015	MATERIAL		SEE TABLE		SHEET
4 PLC	± .-	FINISH		SEE TABLE		1 OF 1
ANGLES	± .-	MATERIAL		SEE TABLE		REV
		MATERIAL		SEE TABLE		J1