

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
		L1		REVISED PER ECO-11-004917	11MAR11	RK	HMR

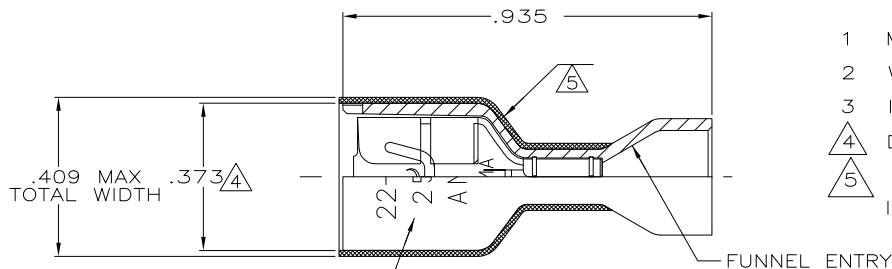

- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .230 MAX DIA
- 4 DIMENSION DOES NOT INCLUDE TRIM BURR
- 5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA



.010 MAX CUT-OFF TAB

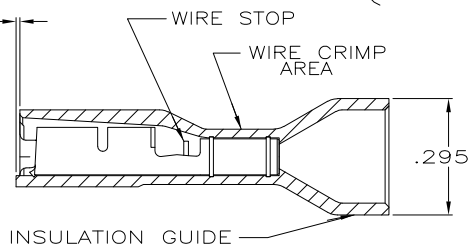

OBSOLETE	HOUSING: NYLON, COLOR-RED TRANSLUCENT	2-520264-4
	RECEPTACLE: #3 HARD PH BRONZE, TIN .000080 MIN	
	HOUSING: NYLON, COLOR-RED TRANSLUCENT	2-520264-2
	RECEPTACLE: #3 HARD BRASS, TIN .000080 MIN	
MATERIAL & FINISH		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P FORTNEY 9/30/88	STE TE Connectivity	
DIMENSIONS: INCHES		CHK MS FEHER 9/30/88		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K RANDOLPH 9/30/88	NAME	
0 PLC ± -		RECEPTACLE ASSY, ULTRA-FAST, LOOSE PIECE, .250 SERIES, 22-18 AWG		
1 PLC ± -		PRODUCT SPEC		
2 PLC ± -		108-2043		
3 PLC ± .015		APPLICATION SPEC		
4 PLC ± -		114-2123		
ANGLES ± -		WEIGHT	SIZE	CAGE CODE
MATERIAL SEE TABLE	FINISH SEE TABLE	-	A3	00779
		DRAWING NO		RESTRICTED TO
		C=520264		-
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV L1