

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	REVISED PER ECO-11-004820	11MAR11	RK	HMR

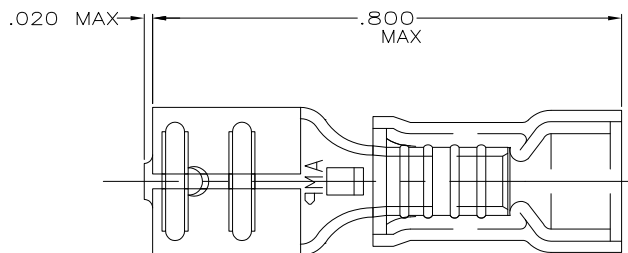

- 1. INSULATION DIA .170 MAX
- 2. FITS TAB .020 THK

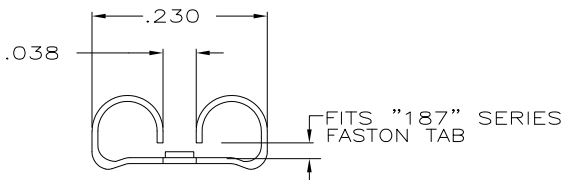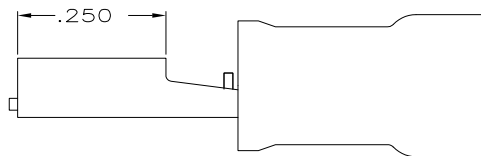

-	-	-
100	LOOSE PC,BOX	8-640919-1
-	TAPE MOUNTED	640919-2
-	LOOSE PIECE	640919-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: -	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L OLMEDA 26JUN95					
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .015 3 PLC ± - 4 PLC ± - ANGLES ± -	CHK M ELLIS 26JUN95			APVD B BARE 26JUN95	NAME	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: -			PRODUCT SPEC	RECEPTACLE, 187 SERIES, FASTON™, PIDG™, WIRE SIZE 16-14				
FOR ORDER ENTRY	1-800-526-5142		MATERIAL BODY,BRASS .016 SLV,NYLON,COLOR,BLUE	FINISH BODY,TIN	APPLICATION SPEC	SIZE A3	CAGE CODE 00779	DRAWING NO C-640919	RESTRICTED TO	
1470-19 (3/11)					WEIGHT	CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 1	REV G1