

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	C1	REVISED PER ECO-11-004917	11MAR11	RK	HMR		

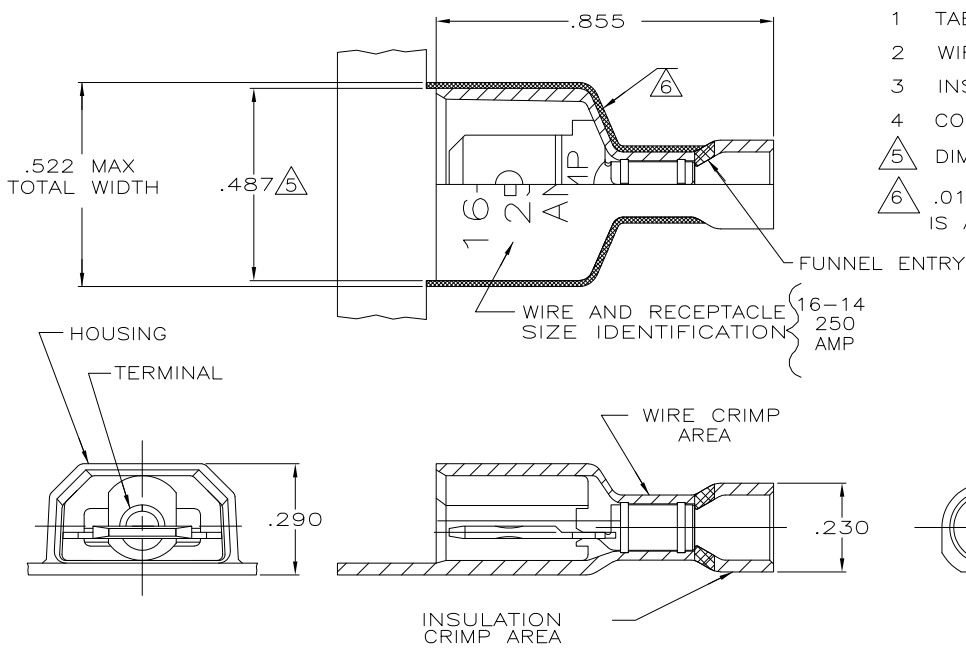

- 1 TAB DIMENSIONS .032±.001x.250
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .090-.160 DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-BLUE TRANSLUCENT	3-521057-2
TAB: #3 HARD BRASS, TIN .000080 MIN	
MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	3/14/94	 TE Connectivity		
DIMENSIONS: INCHES		CHK	MS FEHER	3/14/94			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	D BRATINA	3/14/94			
0 PLC	± -	NAME		TAB ASSEMBLY, ULTRA-FAST, PLUS, .250 SERIES, 16-14 AWG			
1 PLC	± -	PRODUCT SPEC		108-2017			
2 PLC	± -	APPLICATION SPEC		114-2123			
3 PLC	± .015	SIZE		CAGE CODE	DRAWING NO		
4 PLC	± -	WEIGHT		A3	00779	C=521057	
ANGLES	± -	MATERIAL		CUSTOMER DRAWING			
SEE TABLE	SEE TABLE	FINISH		SCALE	4:1	SHEET 1 OF 1	REV C1