

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	H1	REVISED PER ECO-11-004587	11MAR11	RK	HMR		

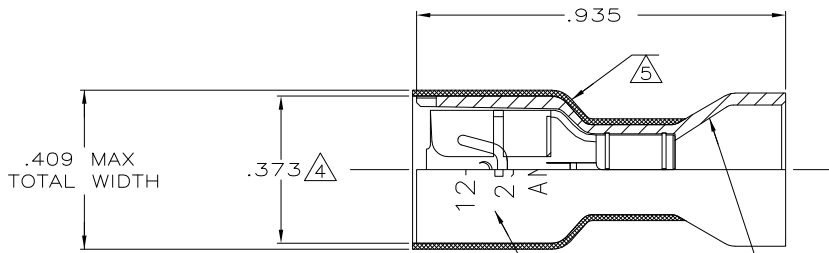


- 1 MATES WITH .032± .001x.250 TAB
- 2 WIRE STRIP LENGTH .312
- 3 INSULATION SIZE .320 MAX DIA
- 4 DIMENSION DOES NOT INCLUDE TRIM BURR
- 5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA



.010 MAX CUT-OFF TAB

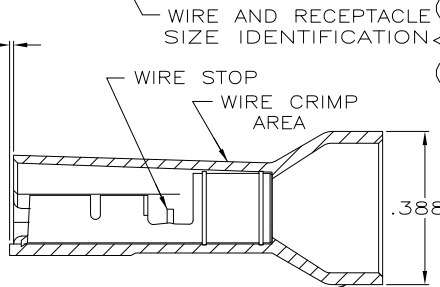

FUNNEL ENTRY
 WIRE AND RECEPTACLE
 SIZE IDENTIFICATION } 12-10
 250
 AMP



HOUSING: NYLON, COLOR-YELLOW TRANSLUCENT
 RECEPTACLE: #3 HARD BRASS, TIN .000080 MIN

4-520448-2

MATERIAL & FINISH

PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN P FORTNEY 11/4/88

CHK MS FEHER 11/7/88

APVD K RANDOLPH 11/7/88



DIMENSIONS:

TOLERANCES UNLESS OTHERWISE SPECIFIED:



0	PLC	±	-
1	PLC	±	-
2	PLC	±	-
3	PLC	±	.015
4	PLC	±	-
	ANGLES	±	-

MATERIAL

FINISH

SEE TABLE

SEE TABLE

NAME

PRODUCT SPEC

108-2043

APPLICATION SPEC

114-2035

WEIGHT

CUSTOMER DRAWING

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 C=520448

SCALE 4:1 SHEET 1 OF 1 REV H1

RECEPTACLE ASSEMBLY, ULTRA-FAST,
 LOOSE PIECE .250 SERIES, 12-10 AWG