



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A1		REVISED PER ECO-11-004820	11MAR11	RK	HMR

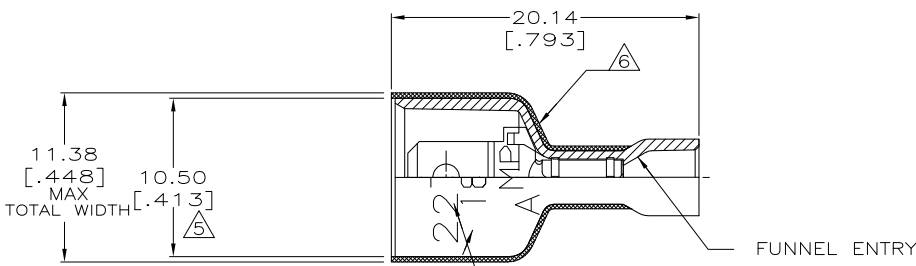

- 1 TAB DIMENSIONS .020± .001x.187
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 SUPPLIED IN LOOSE PIECE
- △ DIMENSION DOES NOT INCLUDE TRIM BURR
- △ 0.38[.015] MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

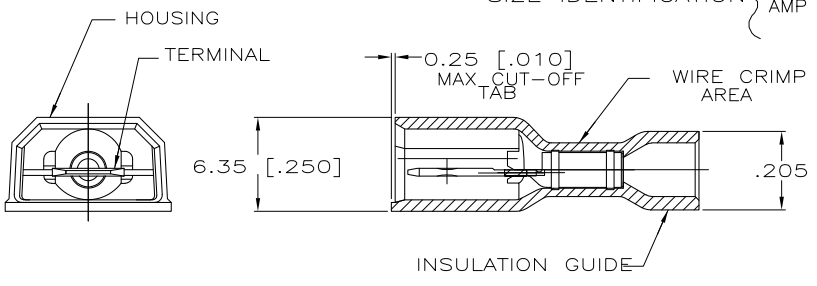

HOUSING: NYLON, COLOR-RED TRANSLUCENT	2-521103-2
TAB: #3 HARD BRASS, TIN .000080 MIN	
MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	9/25/95	TE Connectivity
		CHK	9/25/95	
		APVD	9/25/95	
		J WORMAN		
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME		TAB ASSEMBLY, ULTRA-FAST, 4.75 [.187] SERIES, 22-18 AWG
MM (INCHES)		PRODUCT SPEC		
		APPLICATION SPEC		
		108-2017		
		114-2123		
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE
SEE TABLE	SEE TABLE	-	A3	00779
			DRAWING NO	RESTRICTED TO
			C=521103	-
CUSTOMER DRAWING			SCALE	SHEET
			4:1	1 of 1
			REV	A1