

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
AF	50	M1	REVISED PER ECO-11-004917	11MAR11	RK HMR	

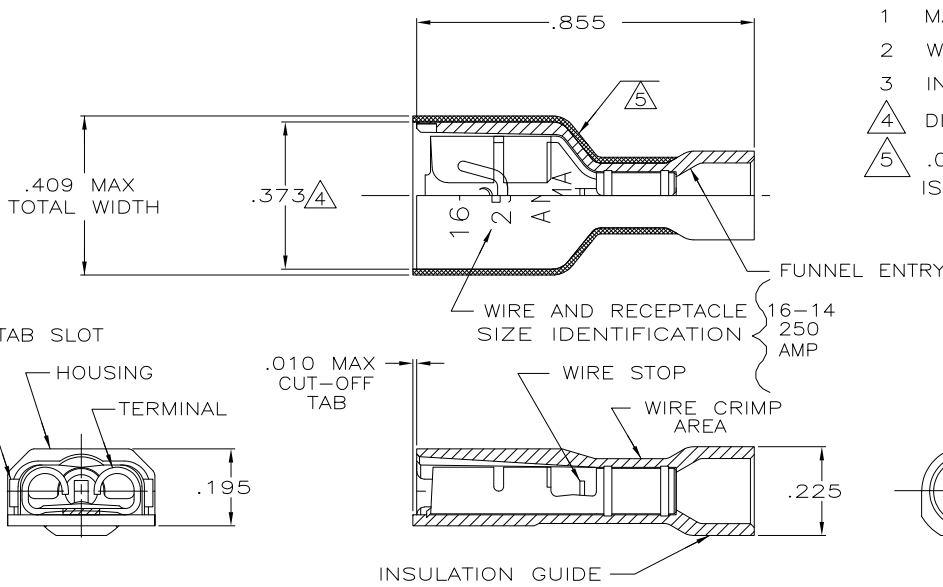

- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .160 MAX DIA
- 4 DIMENSION DOES NOT INCLUDE TRIM BURR
- 5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-BLUE TRANSLUCENT	3-520117-2
RECEPTACLE: #3 HARD PHOS BRONZE TIN PL .000080 MIN THK	
MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P FORTNEY 10/18/88	STE TE Connectivity
DIMENSIONS: INCHES		CHK JR RUTH 10/18/88	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K RANDOLPH 10/21/88	NAME
0 PLC ± -	SEE TABLE	PRODUCT SPEC	RECEPTACLE ASSY, ULTRA-FAST, LOOSE PIECE, .250 SERIES, 16-14 AWG
1 PLC ± -		108-2043	RESTRICTED TO
2 PLC ± -		APPLICATION SPEC	SIZE
3 PLC ± .015		114-2123	CAGE CODE
4 PLC ± -		WEIGHT	DRAWING NO
ANGLES ± -	FINISH	A300779	C=520117
MATERIAL	SEE TABLE	CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV M1