

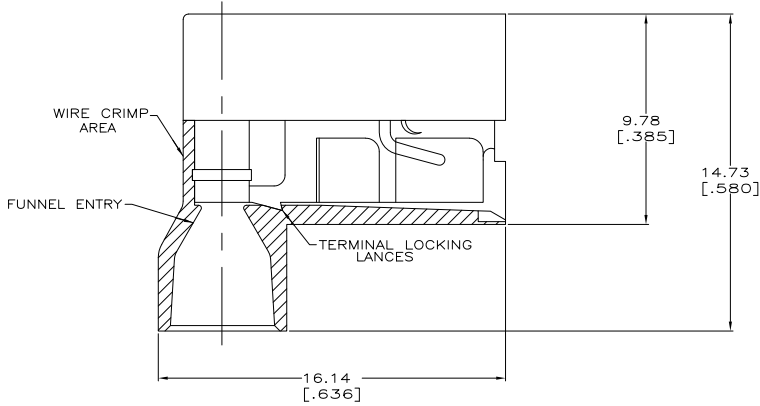


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

REV	DATE	BY	APP'D	DESCRIPTION
S1	11MAR11	RK	HMR	REVISED PER ECO-11-004587

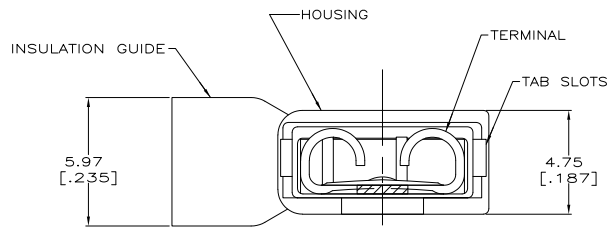

- 1 FITS 0.81±0.025 X 6.35 [.032±.001 X .250] TAB
- 2 WIRE SIZE: 0.3-0.9mm<sup>2</sup> [22-18 AWG], STRANDED ONLY. STRIP LENGTH 7.94 [.312]
- 3 INSULATION SIZE: 4.19 [.165] MAX DIA.
- 4 SUPPLIED AS LOOSE PIECE.

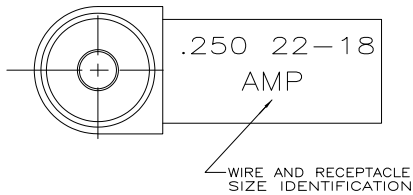

**METRIC**

TYPE 6/6	RED	0.41 [.016]	TIN	2-520129-2
MATERIAL NYLON	COLOR TRANSLUCENT	MATERIAL #4H BRASS	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE 10/19/89	TE Connectivity
DRAWN BY P. FORTNEY		DATE 10/19/89	RECEPTACLE ASSEMBLY, ULTRA-FAST FLAG, 6.35 [.250] SERIES
CHECKED BY R. RUTH		DATE 10/19/89	
DESIGNED BY D. BRATINA		DATE 10/19/89	SIZE A2
DIMENSIONS: TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-2043	SCALE 8:1
1 PUC ± -		APPLICATION SPEC 114-2123	SHEET 1 of 1
2 PUC ± -		WEIGHT -	REV S1
3 PUC ± 0.38 [.015]		CAGE CODE A200779	DRAWING NO C=520129
4 PUC ± -		CUSTOMER DRAWING	