

DO NOT SCALE
DIMENSIONS IN mm


METRIC




NOTES

- 1 NO BEAT IN LOCKING LANCE REQUIRED.
- 2 FOR HIGHER EXTRACTION FORCE APPLICATION.
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

GENERAL TOLERANCES ±0.3

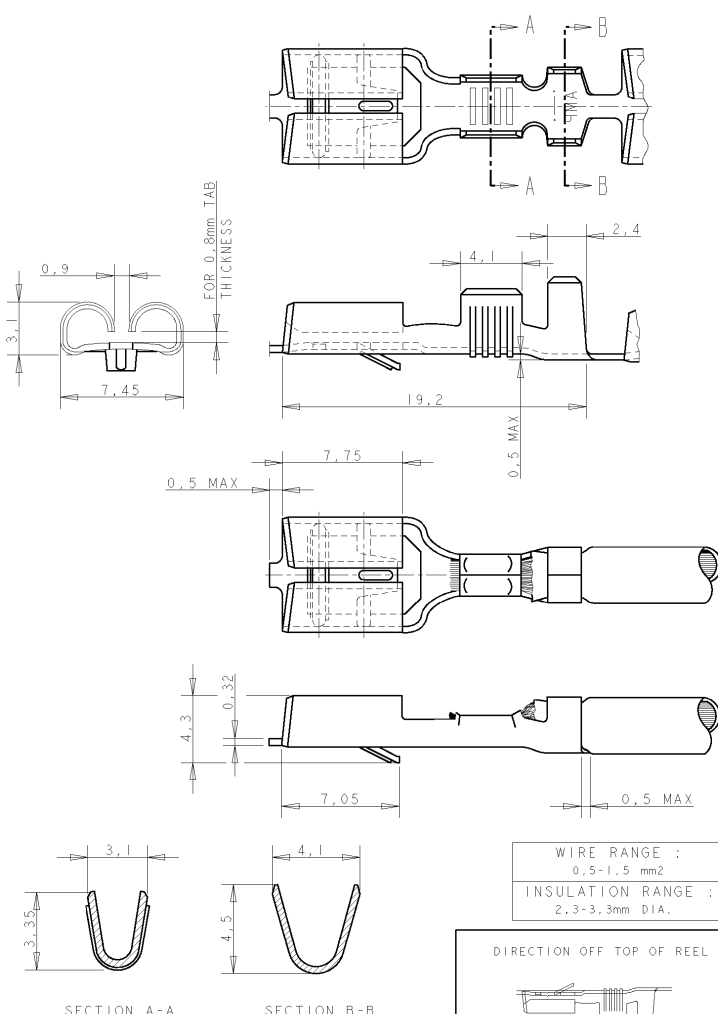

WIRE RANGE :
0.5-1.5 mm²
INSULATION RANGE :
2.3-3.3mm DIA.



NOTES	FINISH	MATERIAL	AMP P/N	REV
3 OBSOLETE	PRE-TINPLATED	PH. BRONZE	6-160526-8	
	PRE-TINPLATED	BRASS	6-160526-7	
	UNPLATED	BRASS	9-160526-4	
	TINPLATED	PH. BRONZE	6-160526-2	
	SILVERPLATED	BRASS	6-160526-1	
	SILVERPLATED	PH. BRONZE	6-160526-0	
	TINPLATED	PH. BRONZE	5-160526-9	
	UNPLATED	PH. BRONZE	5-160526-8	
	TINPLATED	BRASS	5-160526-7	
	UNPLATED	BRASS	5-160526-6	
TINPLATED	PH. BRONZE	160526-4		

AL2	REV PER ECO-10-000444	KK	AEG	09JAN10	CUSTOMER DRAWING
AL1	ES00-0086-04	J.L	J.L	200604	FOR REFERENCE ONLY WILL NOT BE UPDATED
AL	ES00.0008-03	J.L	J.L	17JAN03	© COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.
AK	ES00-0065-01	JC	JL	19JUN01	THIS DRAWING IS UNPUBLISHED
AJ	ES00-0043-01	JC	RS	15MAY01	RELEASED FROM PATENT PROTECTION
AH	REVISED FOR ET00-0171-00	H. Y.	C. T	12 JUN 00	
C	H-9671	JvL	AB	23-03-92	
LTR.	REVISION RECORD	DR.	CHK.	DATE	
DR. :	J. V. LIEMPT.	CHK. :	A. BIJNEN.	APP. :	L. V. SOEST.
DATE :	23 MAR 1992	DATE :	-	DATE :	-
					NAME
					FASTIN-FASTON® Connector, .250" sr. REC. CONTACT.
					DWG. No.
					C-160526
					REV. LTR.
					AL2
					SHEET
					1 of 1
					A3

R6-128 (REV. 04-91) 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1