


SECTION A-A SECTION B-B

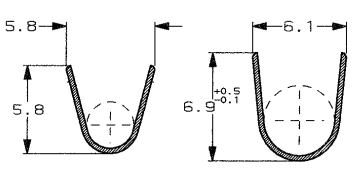

NOTES:

- 1) SPEC. DI PRODOTTO 108-20020; SPEC. DI AGGRAFFATURA 114-20021 (PRODUCT SPEC. 108-20020, APPLICATION SPEC. 114-20021).
- △ NERVATURA DI RINFORZO (BEAT IN LOCKING LANCE).
- △ AVVOLTO SU BOBINA 12" DI CARTONE, Q.TA'/BOB. : 8.000 PZ. (CREELED ON 12" CARTON REEL, Q.TY/REEL : 8.000)

STATO DI FORNITURA - SCALA 1:1
(SUPPLY CONDITION - SCALE 1:1)

- "U-ING UP" → SENSO DI USCITA DEL TERMINALE DALLA BOBINA
- "U-ING DOWN" → DIRECTION OFF TOP OF REEL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	181626-2	△ PRE-STAGNATO (PRE-TIN PLATED)	OTTONE (BRASS)	180560-2	U
	181626-2	△ PRE-STAGNATO (PRE-TIN PLATED)	OTTONE (BRASS)	180560-6	U
△ OBSOLETE	181626-1	NUDO (UNPLATED)	OTTONE (BRASS)	180650-1	T
		LOOSE PIECE P/N	NOTE	FINITURA/COLORE (FINISH/COLOUR)	MATERIALE (MATERIAL)
				NUMERO (AMP P/N)	REV.

CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO	
THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION 19	
© COPYRIGHT 1989 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING.			
TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)		DIAM. ISOLANTE (INS. DIA. RANGED)	RANGO FILO (WIRE RANGED) 2
± 0.3		3.4-5.1	4.0-6.0
ANGOLI (ANGLES) ± 2°		SCALA (SCALE) 4:1	
DIS. H. YAALI (GR.) 12 JUL 99		DESCRIZIONE (DESCRIPTION) FASTIN-FASTON® Connector	
U1 REVISED PER ECO-09-026346		.250" sr. REC. CTC (WITH DIMPLE)	
U CHANGED RAW MATERIAL FOR "6" & REDRAWN. ETOD-0050-00		LOC. SIZE NUMERO (LOC. NO.)	
REV. REVISIONI (REVISION RECORD)		I A C-180560 U1	
REV. 1	DIS. DATA (DATE)	REV. 1	FOGLIO (SHEET) 1 DI (OF) 1

DISTRIBUZIONE CANINT. DIST. C.