

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	T	REV PER 0G3A-0210-03	10APR03	JR DD

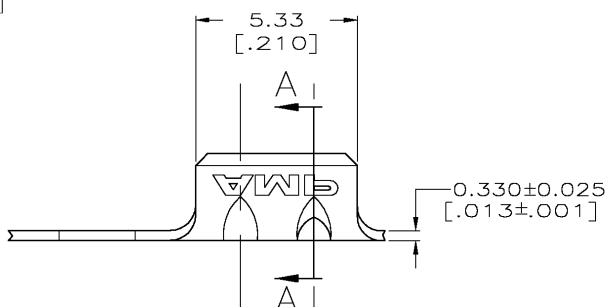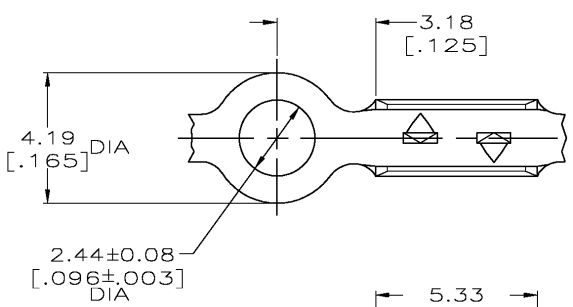

- 1 CONTINUOUS STRIP ON REEL.
- 2 0.00254 [.000100] MIN GOLD PL PER MIL-G-45204 OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE PER QQ-N-290.
- 3 0.00508 [.000200] MIN NICKEL PL PER QQ-N-290.
- 4 WIRE SIZE 22-20 AWG
- 5 INSULATION RANGE IS 1.27-1.65 [.050-.065] DIA
- 6 PACKAGED WITH PAPER
- 7 PRELIMINARY - NOT FOR PRODUCTION

3	6	7	60422-5
3			60422-3
2			60422-1
FINISH		PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN PHILLIP M. FORTNEY 6/15/94	Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: INCHES		CHK JEFF R RUTH 6/15/94	APVD R KUZO 6/15/94	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RING, INSULATION PIERCING		
0 PLC	± -	PRODUCT SPEC		
1 PLC	± -	APPLICATION SPEC		
2 PLC	± 0.25 [.010]	SIZE A3		
3 PLC	± -	CAGE CODE 00779		
4 PLC	± -	DRAWING NO C=60422		
ANGLES	± -	RESTRICTED TO		
MATERIAL 082 BRASS	FINISH SEE TABLE	WEIGHT	CUSTOMER DRAWING	
		SCALE 8:1	SHEET 1 OF 1	REV T

AMP 1470-19 REV 31MAR2000

H:\dmtecm0d\