


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
H	-					
	A	ECR-05-010922	13SEPT05	RvH	MvD	

P.C.B. HOLE DIM. ACTION PIN

DRILLED HOLE	: 1.60 ±0.025	mm
FIN. HOLE	: 1.39 to 1.54	mm
AFTER REFLOW	: 1.37 to 1.54	mm
Cu-thks	: 0.025 to 0.075	mm
SnPb-thks	: 0.004 to 0.010	mm

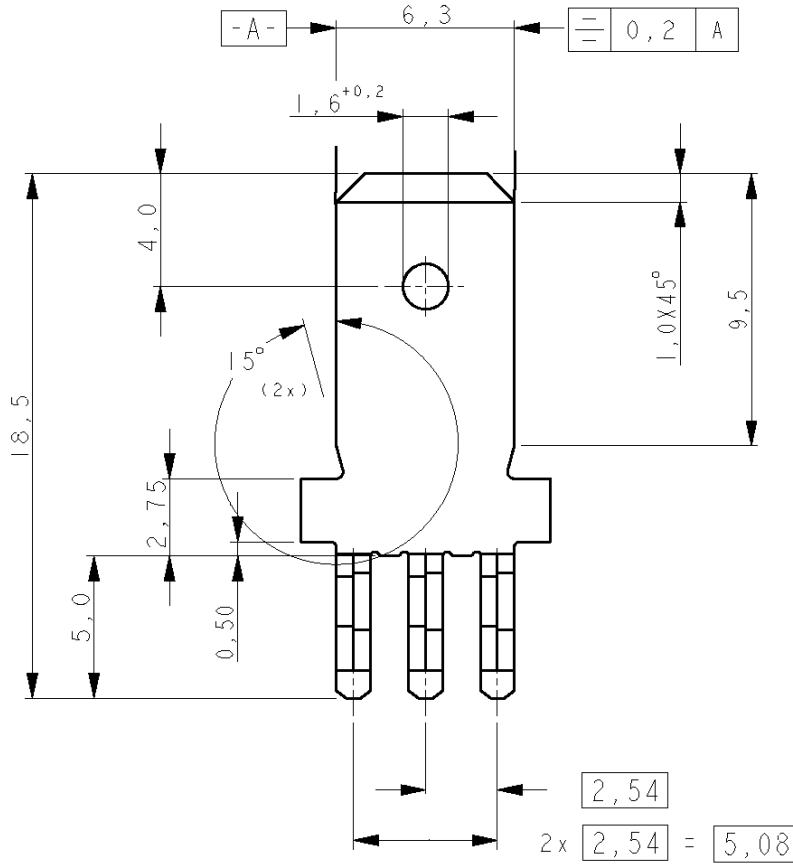

(2,4-3,2 P.C. BOARD THICKNESS.)

2,54 μ M MIN. SN ALL OVER.	PHOSPHORBRONZE	100278-1
FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS UNPUBLISHED.  
 RELEASED FOR PUBLICATION  
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.  
 COPYRIGHT -

DIMENSIONS: mm	DWN	28-02-91	MATERIAL	-	FINISH	-
	RvL	LOKVEN				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	13SEPT05	TYCO ELECTRONICS NEDERLAND B.V. 's-HERTOGENBOSCH, THE NETHERLANDS			
	MvD	RRIEL				
0 PLC ±-	APVD	13SEPT05	NAME .250 SERIES TAB WITH ACTION PIN FOR POSITIVE LOCK RECEPTACLE			
1 PLC ±-	MvD	RRIEL				
2 PLC ±-	PRODUCT SPEC	-	SIZE	A4	CAGE CODE	00779
3 PLC ±-	APPLICATION SPEC	-	DRAWING NO	C=100278		
4 PLC ±-	WEIGHT	-	RESTRICTED TO	-		
ANGLES ±-	CUSTOMER DRAWING		SCALE	-	SHEET	69
			OF	1	REV	A