




C.A.D. FILE CODE  
S. C344995.A

DO NOT SCALE      DIMENSIONS IN MM.     

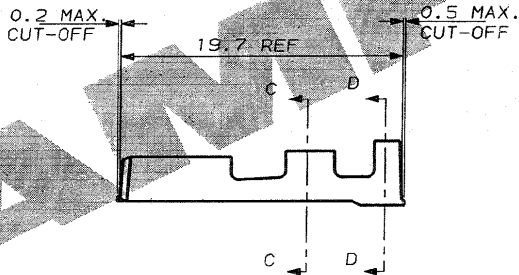

SECTION C.C.

SECTION D.D.

WIRE RANGE 0.5 TO 1.5 mm<sup>2</sup>  
INS. RANGE 1.6 TO 2.4mm DIA. (THIN WALLED CABLE)

PRODUCT SPEC. 108-3069

APPLICATION SPEC. 114-3036

H/T00L PN.525316-4 (FOR 0.5 TO 0.75mm<sup>2</sup> AND 1 TO 1.5mm<sup>2</sup> WIRES)

SEALED APPLICATIONS ONLY

PRE-TINNED BRASS		MADE FROM STRIP PN.344070-1	344995-1
FINISH		MATERIAL	PART NUMBER
CUSTOMER DWG FOR REFERENCE ONLY		©COPYRIGHT 1991 BY AMP OF GREAT BRITAIN LTD. ALL INTERNATIONAL RIGHTS RESERVED. ALL PRODUCTS MAY BE COVERED BY BRITISH AND FOREIGN PATENTS AND/OR PATENTS PENDING.	RELEASED FOR PUBLICATION 25 SEP 1991
-	-	TOLERANCES UNLESS OTHERWISE STATED	DR. R. J. S. 25.9.91
-	-	DEC ± 0.5	Ch. Rev. 29/9/91 APP. J.P.
-	-	ANGLES ± 1°	AMP TERMINAL HOUSE STANMORE HDDX.
-	-	NAME	.250 SERIES REC. (LOOSE PIECE) ECONOSEAL 3 H.C. (SEALED)
A	EROD-COLL-01	11.01.01	
1	PRELIM. ISSUE	26.9.91	SCALE LOC SIZE DWG. No. REV SHEET
REV	APPROVED	ECN DATE	4/1 E A3 C344995 A 1/1