THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER		WIRE RANGE	MAX. WIRE INSUL. DIA.	HOUSING COLOR	DIMENSIONS in.		
PREFIX	PK	AWG			A ±.03	B ±.010	C ±.01
DV18-145M	-C -M -MY	22-18	.15 (3,8)	RED	.97 (24,6)	.145 (3,7)	.03 (0,76)
DV14-145M	-C -M	16-14	.17 (4,3)	BLUE	.97 (24,6)	.145 (3,7)	.03 (0,76)

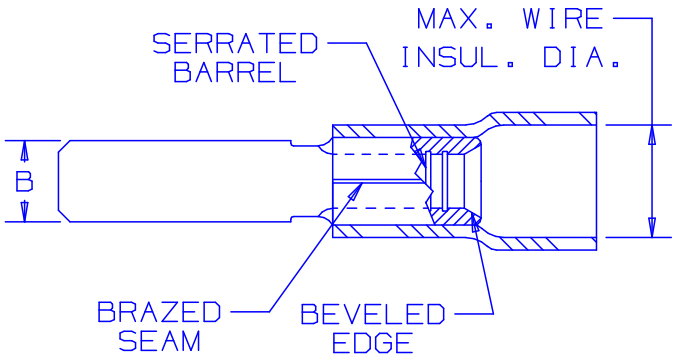

NOTES:

1. UL RECOGNIZED AND CSA CERTIFIED FOR:
   A. 600V. MAX. VOLTAGE RATING
   B. 221° F (105° C) MAX. TEMP. RATING
   C. FOR STRANDED COPPER WIRE ONLY
2. MATERIAL:
   A. STAMPING - .032" (0.8) THK COPPER TIN PLATED
   B. HOUSING - VINYL
3. PACKAGE QTY: STD. PKG. -C=100
   BULK PKG. -M=1000, -MY=1000
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS:
   A. UL RECOGNIZED AND CSA CERTIFIED:
      CT-500, CT-550, CT-1551, CT-1550
   B. PANDUIT APPROVED: CT-160, CT-260, CT-100, CT-250, CT-400, *CT-460
      *RECOMMENDED FOR DV14-145M ONLY
6. WIRE STRIP LENGTH: 9/32 $^{+1/32}_{-0}$ (7.1 $^{+.8}_{-0}$)

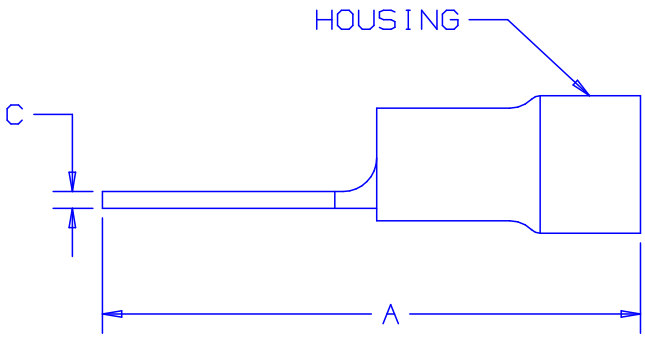

CERTIFIED LR31212

RECOGNIZED E78522

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
08	5/05	JHNU		ADDED PACKAGING CODE "MY" TO DRAWING.			
07	11/04	KLFU	SKB	REMOVED LOGO FROM TOP OF TAB	12453	SKB	TRO
06	1/01	RM	SKB	FILESPEC WAS N41321AA_PCD_05	08925	JAC	CCH
05		JKD		ADDED CT-1551 & CT-1550 TOOLS	07632		
04	10/94	TH	RLS	UPDATED NOTES AND DIMENSIONS	02571	LCA	TFKE

A41321_08

PANDUIT CORP. TINLEY PARK, ILLINOIS

VINYL INSULATED .145 X .032
(3.68 X 0.81) MALE TAB

DRAWN BY	CHK'D	SCALE	DRAWING NO.
DAW		NONE	A41321

Downloaded from Elcodis.com electronic components distributor