
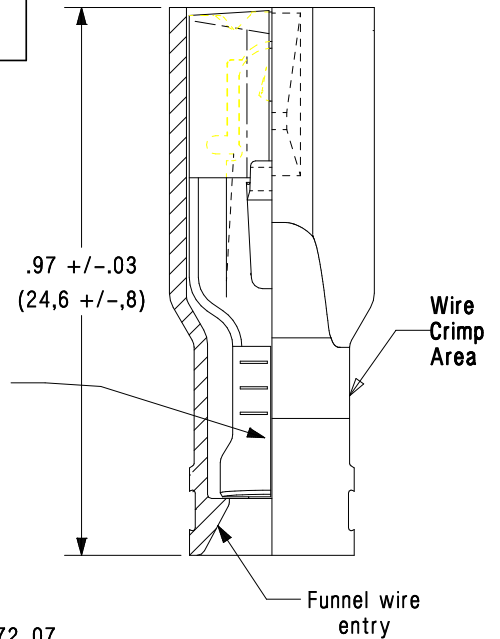


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Panduit Part number	Wire range AWG (mm ²)	Housing color	Dim. "F"	Minimum Wire Insulation Diameter	Maximum Wire Insulation Diameter	Tools
DNG18-250FL	22-18 (0,5-1,0)	Red	.24 (6,1)	.060 (1,52)	.126 (3,20)	CT-1014
DNG14-250FL	16-14 (1,5-2,5)	Blue	.25 (6,4)	.080 (2,03)	.150 (3,81)	



Notes:

- Used for:
 - 300 V maximum rating
 - Temperature Rating of Insulation: 105°C (221°F)
 - Stranded copper wire only
- Wire strip length: 1/4 ^{+1/32} ₋₀ (6,4 ⁺⁸ ₋₀)
- Material:
 - Stamping - Tin plated brass
 - Housing - Nylon
- Tab size .250 X .032 (6,3 X ,8)
Hole type detent
- Packaging:
 - X = 10 pieces
 - C = 100 pieces
 - M = 1000 pieces
- Dimensions in brackets are in millimeters or mm²



07	10/06	DAW	DAW	ADDED -X PACKAGING CODE	TR00171	TRO	LCA
06	6/04	JHNU		REVISED PART GEOMETRY IN VIEW.	011922	TRO	SKB
05	1/01	EJS	SKB	WIRE RANGE FOR PART DNG18-250FL WAS (0,5-1,5), NOTE 1-B WAS 257°F(125°C) MAX TEMP RATING, FILE SPEC WAS N41569AA_PCD_04	08966	CCH	JAC
04	1/97	JAMB	RLS	ADDED TO NOTES, "MIN. WIRE INSULATION DIA."	05405	DBH	LA
03	12/95	ED	RLS	REVISION TO NOTES AND UL RECOGNIZED	03835	TFKE	LA
02	2/95	MS	JW	WIRE STRIP LNPTH WAS 3/16, TOOL NO. WAS CT-1000	03003	KS	LA
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

Disco-Lok™ Loose piece
Fully Insulated Locking Female Disconnect

DRAWN BY	CHK'D	SCALE	DRAWING NO./CAD FILENAME
BDK	JAW	None	A41572

A41572_07