
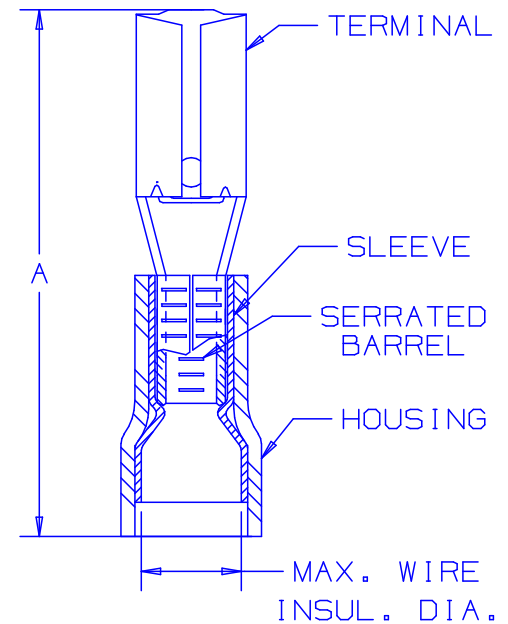


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	TAB SIZE	WIRE RANGE AWG	MAX. INSUL. DIA.	DIMENSIONS in.		
				A $\pm .03$	B $\pm .01$	C $\pm .01$
DNF18-110	.110 X .032 (2.8 X 0.8)	22-18 (0,5-1,0)	.100 (2.54)	.69 (17.5)	.15 (3.8)	.08 (2.0)
DNF18-111	.110 X .020 (2.8 X 0.5)	22-18 (0,5-1,0)	.100 (2.54)	.69 (17.5)	.15 (3.8)	.07 (1.8)

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
 - A. 300V. MAX. VOLTAGE RATING
 - B. #22-18 AWG STRANDED COPPER WIRE ONLY
 - C. 194° F (90° C) MAX. TEMP. RATING
- MATERIAL:
 - A. STAMPING - .010" (0.25) THK BRASS, TIN PLATED
 - B. SLEEVE - BRASS, TIN PLATED
 - C. HOUSING- NYLON, RED
- PACKAGE QTY: STD. PKG. -C= 100
BULK PKG. -M= 1000
- INITIAL INSERTION FORCE - 12 LB. (53 N) MAX
INITIAL WITHDRAWAL FORCE - 12 LB. (53 N) MAX
6 LB. (27 N) MIN
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm²
- INSTALLATION TOOLS:
 - A. UL LISTED & CSA CERTIFIED: CT-520, CT-1525
 - B. PANDUIT RECOMMENDED: CT-100
- WIRE STRIP LENGTH: $9/32^{+1/32}_0$ (7.1 $^{+.8}_0$)



LISTED
20H3
E78522



CERTIFIED
LR31212

A41308_05

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.
05	7/03	KLFU		UPDATED DRAWING							
04	5/98	TM	JW	ADDED CT-1525 TO TOOL NOTES	06872	LA	DH				
03	6/95	MS	RS	UPDATED NOTES AND DIMENSIONS	03370	LA	KS				
02	11/94	TH	RS	UPDATED NOTES AND DIMENSIONS	02689	LA	TK				
								DAW		NONE	A41308

PANDUIT CORP.

TINLEY PARK, ILLINOIS

#22-18 BARREL NYLON INSULATED FEMALE DISCONNECT, FUNNELED WIRE ENTRY