


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

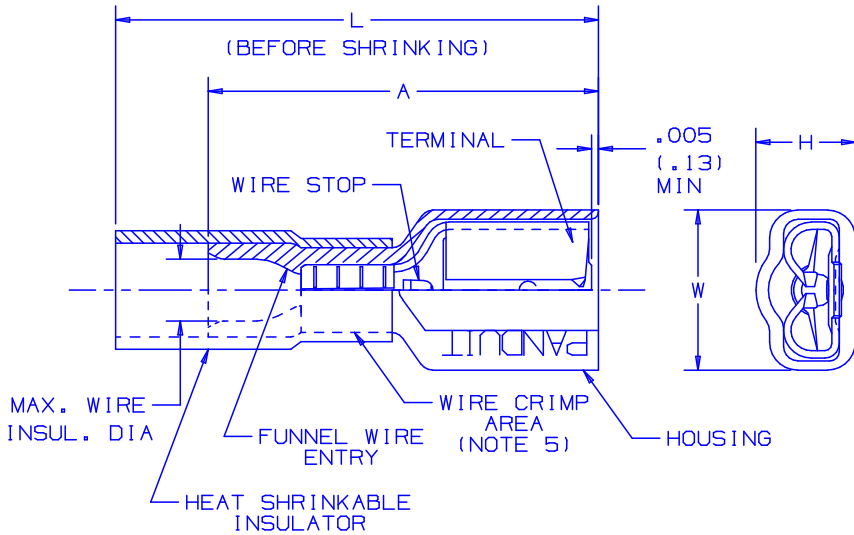


NOTES:

1. FOR USE WITH STRANDED COPPER WIRE ONLY (SEE TABLE FOR WIRE RANGE)
2. MATERIAL:
 - A. TERMINAL - CDA 260 BRASS, TIN PLATED
 - B. HOUSING - TYPE 66 NYLON
 - C. INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
3. MINIMUM SHRINK TEMPERATURE: 300°F (150°C)
4. ALL DIMENSIONS SHOWN ARE NOMINAL. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
5. PART NUMBER DNH10-250FI IS CONSTRUCTED WITH A BRASS SLEEVE IN WIRE CRIMP AREA.
6. INSTALLATION TOOL: CT-310
7. PKG. QTY. :
 - STD. PKG. -0=25
 - E=20
 - BULK PKG. -D=500
 - T=200

PART NUMBER	TAB SIZE	WIRE RANGE AWG	HOUSING COLOR	MAX. INSUL. DIA.	DIMENSIONS				STRIP LENGTH	
					A	W	H	L		
DNH18-250F1B	-0 -D	.250 X .032 (6.3 X 0.8)	22-18	RED	.132 (3.35)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH14-250F1B	-0 -D	.250 X .032 (6.3 X 0.8)	16-14	BLUE	.156 (3.96)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH10-250FI	-E -T	.250 X .032 (6.3 X 0.8)	12-10	YELLOW	.230 (5.84)	.96 (24.4)	.35 (8.9)	.27 (6.9)	1.44 (36.6)	3/8 (9.5)

A41458_05

05	7/03	KLFU		ADDED INTERNAL SERRATIONS					 TINLEY PARK, ILLINOIS HEAT SHRINK FULLY INSULATED FEMALE DISCONNECTS		
04	4/01	SAB	SKE	ADDED PACKAGING CODES AND NOTE 7	09325	JAC	TRO				
03	1/01	RM		FILESPEC WAS N41458AA_PCD_02	08933						
02	5-95	MS		UPDATED NOTES AND DIMENSIONS	03331						
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY DRL	CHK'D	SCALE NONE	DRAWING NO. A41458